



**PALLMANN®**  
FOR WOOD FLOORS. FOR LIFE.

# EVERYTHING BUT THE WOOD

**PRODUCT GUIDE**



**UZIN UTZ®**

**PALLMANN.**

**FOR WOOD**

**FLOORS.**

**FOR LIFE.**



## 1900

Pallmann GmbH founded by Georg Pallmann in Munich



## 2000

Acquisition of the wood floor lacquer specialist Attex/Austria by Uzin Utz AG

## 1982

Introduction of first water-based wood floor lacquer

## 2002

Merger between Pallmann GmbH and Attex to form PALLMANN GmbH

## 2001

Uzin Utz AG takes over Pallmann GmbH

## 2004



Introduction of the first solvent-free oil-wax combination MAGIC OIL 2K ORIGINAL

## 2004

Stefan Neuberger takes over the management of the company



## 2006

Relocation to Würzburg with new production and office space



## 2009

Introduction of PALLMANN X-LIGHT SYSTEM – first solvent- and ozone-free system (UV-system)



## 2014

Introduction of the first solvent-free wood floor coating system PALL-X ZERO



## 2015

Introduction of the wood floor sanding machine PALLMANN SPIDER

## 2016

Expansion of the management by Philipp Utz



## 2018

Introduction of the PALLMANN COLOR COLLECTION

## 2022

Introduction of the first solvent-free, 1-component wood floor lacquer



## 2021

Grand finale of the PALL-X 96 WOOD FLOOR WORLD CUP



# THEN AS NOW, FOUNDED AND MANAGED BY THE UTZ FAMILY

Chemical product  
manufacturer:  
„Fabrikation  
Chemischer Produkte“

# 1911




**1911**  
**GEORG UTZ**

First generation founder of UZIN. The family business had its roots in Vienna as a chemical product manufacturer (as the „Fabrikation Chemischer Produkte“ company). The war initially put an end to business before it.



**1961**  
**G. WILHELM UTZ**

Second generation takes over management of the company and moves UZIN to its current location in Ulm. At that time, the company generated turnover of around 12 million euros and had about 100 employees.

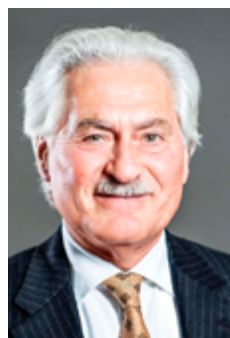

**1980**  
**DR. H. WERNER UTZ**

Becomes Chairman of the Board and begins the global expansion of Uzin Utz AG. He was the first in the industry to create Environmental Product Declarations (EPDs) for flooring installation materials and to phase out solvents in adhesives. His defined, sustainable growth strategy set the course for the future.





**2018**

### **JULIAN UTZ AND PHILIPP UTZ**

The two follow in their father's footsteps. They are the fourth generation to lead the fortunes of the family company, with the supervisory board chaired by Dr. H. Werner Utz. They have a vision further into the future and the world of flooring is their vocation.

### **LOOKING AHEAD**

UZIN UTZ plays a leading role in defined markets for flooring installation systems. Thanks to innovative thinking, a sophisticated sustainability strategy and healthy growth, the family company continues to shape the future and set brand new standards for flooring installation. The PASSION strategy sets out the concrete details of our defined goals and how to achieve them. However, that only works with the people on the journey with UZIN UTZ. Highly committed and open-minded employees who stand wholeheartedly behind UZIN UTZ are shaping the future of tomorrow. As we travel forward, however, we must never lose sight of the values of our family business.



# THE ART OF FLOOR SYSTEMS

**Over 111 years, our family of brands has grown and now represents all the disciplines in the art of floor installation. As a family business, the world of flooring is our vocation.**

Together all our brands provide the foundation for professional craftsmanship. Whether UZIN, WOLFF, PALLMANN, arturo, codex or Pajarito, each brand with its particular character is a building block in our flooring expertise and part of the UZIN UTZ family.

We started as a small, regional adhesive manufacturer in Vienna that has developed over the years into a leading global manufacturer of products and systems for flooring technology as well as a pioneer and leader in the industry.


We are united by the passion and ambition to provide our partners with the resources to achieve perfect results for every task. In the future, we will concentrate our diverse expertise under a common banner: „The Art of Floor Systems“.

# UZIN UTZ®


YOUR FLOOR. OUR PASSION.




Installation systems for screeds, flooring and wood flooring.



Machinery and special tools for subfloor preparation and installation of floor coverings.




Complete product range for the installation, renovation and maintenance of wood flooring.

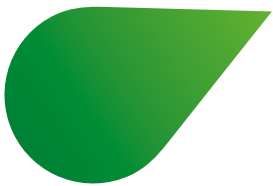

Resin and cementitious floor finishes combining performance and design.



Installation systems for tiles and natural stone.



High-quality painting, plastering and drywalling tools.

**STRONG BRANDS FOR A STRONG TRADE.**

# PALL-X 96 WOOD FLOOR WORLD CUP

Wood floor contractors from all over the world were invited to compete with their most beautiful project, for which the 1-component wood floor lacquer PALL-X 96 was used. The announcement of the winners took place in Würzburg on the 9th of June 2021.

## 1ST PLACE



### POLAND MACIEJ HANDZLINK

**Area:** 750 m<sup>2</sup>  
**Wood:** Oak, maple, merbau  
**New/renovation:** new installation







## 2ND PLACE



### AZERBAIJAN

#### ALISAGANDROV VAQIF IRZVAN

**Area:** 270 m<sup>2</sup>  
**Wood:** Oak, ash, various exotics  
**New/renovation:** new installation

## 3RD PLACE



### ARGENTINA

#### PABLO GENOVESE E HIJOS

**Area:** 400 m<sup>2</sup>  
**Wood:** Pine and walnut  
**New/renovation:** renovation



# CONTENTS

## THE COMPLETE RANGE

### SURFACE TREATMENT

<b>PALLMANN ZERO SYSTEM</b>	<b>14 – 17</b>
PALL-X ZERO 1K	14
PALL-X ZERO FILLER	16
PALL-X ZERO BASE	16
PALL-X ZERO 2K	17

<b>Filler</b>	<b>18 – 20</b>
PALL-X FILLER	18
PALL-X KITT	20

<b>Special Products</b>	<b>20</b>
PALL-X GEL	20
PALL-X 350	20

<b>Primer</b>	<b>21 – 22</b>
PALL-X 325	21
PALL-X 320	21
PALL-X 330	21
PALL-X 333	22

<b>Color Collection</b>	<b>24 – 26</b>
PALL-X 333 C COLOR CONCENTRATE	24
PALL-X 333 COLOR TESTER	26
PALLMANN COLOR COLLECTION STYLEBOX	26

<b>Freestyle Collection</b>	<b>27</b>
-----------------------------	-----------

<b>Lacquer</b>	<b>28 – 32</b>
PALL-X 98	28
PALL-X 96	30
PALL-X 94	32
PALL-X PURE	32
PALL-X SPORT 2K	32

<b>Special Products</b>	<b>33</b>
SPORT-COLOR 2K	33
PALL-X RETARDER	33
PALL-X GRIP	33

<b>Oil</b>	<b>34 – 37</b>
MAGIC OIL 2K ERGO	34
MAGIC OIL 2K ORIGINAL	36
MAGIC OIL 2K WHITE	36
MAGIC OIL 2K SPA	37
MAGIC OIL 1K EASY	37
ECO OIL 1K	37

<b>X-Light System</b>	<b>38</b>
-----------------------	-----------

<b>Solvent-based Products</b>	<b>40 – 41</b>
ALLBASE	40
ALLKITT	40
UNI-KITT	40
SH 81	41
HARDWAXOIL	41

<b>Resilient Floors</b>	<b>42 – 43</b>
TURBO PROTECT PLUS	42
PUR CLEANER	42
TURBO PROTECT EXTRA	43
ELASTIC SEALER	43
TURBO BASIC CLEANER	43

### ADHESION

<b>Wood Floor Adhesives and Primer</b>	<b>46 – 47</b>
PALLMANN P6	46
PALLMANN P5	46
PALLMANN P4	46
PALLMANN P9	47
PALLMANN P104	47

### SUBFLOOR PREPARATION

<b>Primers and Levelling Compounds</b>	<b>49</b>
PALLMANN P25	49
UZIN PE 360 PLUS	49
UZIN NC 182	49

### CARE & MAINTENANCE

<b>Care and Maintenance</b>	<b>52 – 55</b>
MAGIC OIL CARE	52
FINISH CARE	54
FINISH CARE STOP	54
CLEAN	54
CLEAN STRONG	55
MAINTENANCE OIL	55
ECO OIL CARE	55

## OUTDOOR SYSTEM

<b>Outdoor System</b>	<b>58</b>
OUTDOOR-OIL	58
WOOD REFRESHER	58
END GRAIN PROTECTOR	58

## MACHINES & ACCESSORIES

<b>Wood Floor Sanding Machine</b>	<b>62 – 66</b>
PALLMANN SPIDER	62
PALLMANN GECKO STAR 2.0	64
PALLMANN COBRA	66
PALLMANN GECKO FLEX	66
PALLMANN UNO	66

<b>Cleaning Machine</b>	<b>67</b>
PALLMANN TURBO SCRUBBER	67

<b>Accessories for Wood Floor Sanding Machines</b>	<b>68 – 71</b>
SPIDER ADDITIONAL WEIGHT À 15 KG	68
SPIDER DUST SEAL RING	68
SPIDER DUST SEALING SLEEVE	68
SPIDER LED-LIGHT RING	68
SPIDER TRIPLE-DISC-PLATE + VELCRO 180 MM	68
SPIDER TRIPLE-DISC-PLATE ACCESSORIES	68
SPIDER REPLACEMENT VELCRO DISC	
BLUE SELF-ADHESIVE 178 MM	69
SPIDER INTERMEDIATE DISC 180 MM	69
SPIDER CLUTCH CLARKE	69
SPIDER PAD DISC WITH CLARKE COUPLING	69
SPIDER GAS PRESSURE SPRING	69
SPIDER DIAMOND SEGMENT	69
SPIDER DIAMOND SEGMENT BOX	70
GECKO FLEX TRANSPORT CASE	70
GECKO STAR 2.0 EXTENSION SHORT	70
TURBO SCRUBBER BRUSH ROLLER	70
TURBO SCRUBBER SUCTION LIP	70
WOLFF PRE-SEPARATOR 50 L	71

<b>Brush Technology</b>	<b>72</b>
PALLMANN BRUSH SET	72

## CONSUMABLE MATERIAL, TOOLS & ACCESSORIES

<b>Abrasives and Pads</b>	<b>76 – 79</b>
ZIRKON VELCRO DISC 178 MM 10-HOLES	76
CERAMIC PLUS VELCRO DISC 178 MM 10-HOLES	76
SILICON CARBID VELCRO DISC 178 MM 10-HOLES	76
PALLMANN POWER PAD 178 MM	76
PALLMANN POWER PAD 410 MM	76
ABRASIVE GRID 406 MM	77
GLOSSY PAD 410 MM	77
SILICON CARBID VELCRO DISC 150 MM WITH HOLE	77
ZIRKON VELCRO DISC 150 MM	77
ZIRKON VELCRO DISC 150 MM 8-HOLE	78
SILICON CARBID VELCRO DISC 178 MM WITH HOLE	78
ZIRKON VELCRO DISC 178 MM	78
CORUNDUM SANDING BELT 200 X 750 MM	78
ZIRKON SANDING BELT 200 X 750 MM	79
CLEANING PAD 406 / 10 MM	79
CLEANING PAD 406 / 20 MM	79
JOINT FILLER	79

<b>Tools and Accessories</b>	<b>80 – 83</b>
FLOOR MOP / SPARE COVER FOR MOP	80
MAGIC OIL APPLICATOR	80
CLOTH FOR OIL WAX FINISHING	80
TROWEL STAINLESS 27 CM	80
PALLMANN ADHESIVE TROWEL	80
APPLICATION ROLLER WATERBASED UNIVERSAL	
11MM/25CM	81
APPLICATION ROLLER WATERBASED SPECIAL	
8MM/25CM	81
APPLICATION ROLLER WATERBASED GLOSS	
14MM/25CM	81
APPLICATION ROLLER SOLVENTBASED 4MM/25CM	81
NYLON-FIBRE ROLLER	81
HANDLE FOR APPLICATION ROLLER	81
TELESCOPIC HANDLE LP220	82
APPLICATION ROLLER SPORT COLOR 4MM/5CM	82
HANDLE FOR APPLICATION ROLLER COLOR	82
ROLLER CONTAINER	82
INSERT BAG	82
PALLMANN LACQUER BUCKET	82
ADHESIVE TAPE FOR SPORT-COLOR 2K 25 MM X 50 M	83
UZIN CLEAN-BOX	83
RZ ABRASIVE PAD	83



# ABOVE BEYOND

**SURFACE TREATMENT**






# PALL-X ZERO 1K

## 1-COMPONENT LACQUER

Water-based, solvent-free, 1-component wood floor lacquer for high traffic wood floors in residential or commercial areas, which ensures optimum indoor air quality.



### System recommendation for the solvent free system

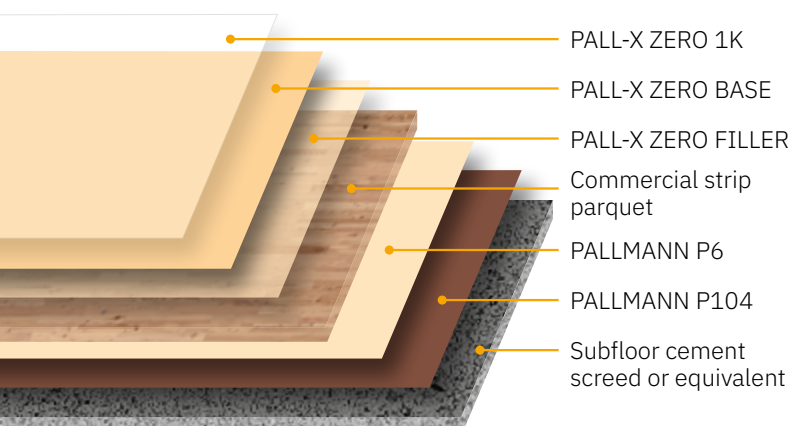

### Suitable for

- sanded wood floors
- use over underfloor heating systems

### Benefits

- very good resistance to high mechanical and chemical wear
- very good filling capacity
- fast drying
- high abrasion and chemical resistance
- solvent-free
- slip resistance R9
- ÖNorm 2354 stress category C

For environmentally conscious people, the best possible indoor air quality and products, are particularly important. With the PALLMANN ZERO SYSTEM you can offer the right solution for this target group.

Item no.	Package size	Gloss value	Consumption	GISCODE
169408	5l	matte	approx. 100 ml / m <sup>2</sup>	W1







”

**The complete PALL-X ZERO system  
is solvent-free and the first choice for  
ecologically conscious customers.**

Petri Iso-Ilomäki,  
PALLMANN Sales Manager Finland



# PALL-X ZERO BASE

## PRIMER

Water-based, solvent-free, 1-component primer for roller application.

### Suitable for

- sanded wood floors
- use over underfloor heating systems

### Benefits

- uniform bright appearance
- good for use on highly absorbent wood species
- minimizes side bonding
- solvent-free



Item no	Package size	Consumption	GISCODE
73172	5 l	approx. 100 ml / m <sup>2</sup>	W1



# PALL-X ZERO FILLER

## FILLER

Water-based, solvent-free joint filler with good filling capacity.

### Suitable for

- sanded wood floors
- woodblocks
- use over underfloor heating systems

### Benefits

- fast drying
- good adhesion for joints up to approx. 1,5 mm
- holds well in joints
- very high color fastness
- visible on the wood floor surface
- will not clog abrasives
- solvent-free
- suitable for all standard types of wood



Item no.	Package size	Consumption	GISCODE
73173	5 l	approx. 50 – 100 ml / m <sup>2</sup>	W1






# PALL-X ZERO 2K

## 2-COMPONENT LACQUER

Water-based, solvent-free, 2-component wood floor lacquer for high traffic wood floors in residential or commercial areas, which ensures optimum indoor air quality. PALL-X ZERO 2K features a low matte appearance that creates a natural beautiful surface.



### System recommendation for the solvent free system

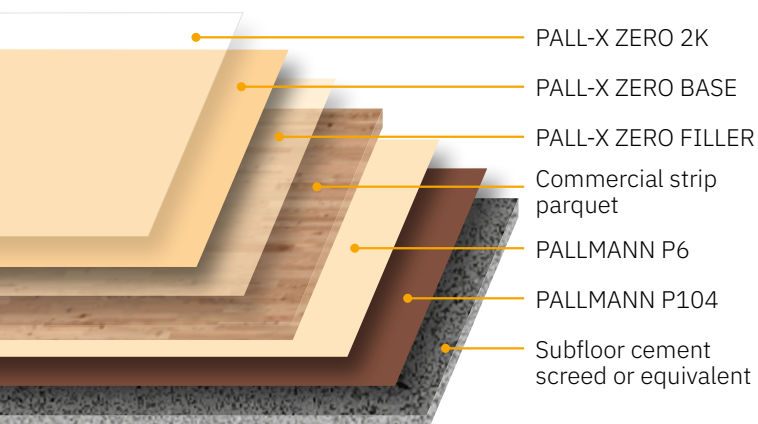

### Suitable for

- sanded wood floors
- use over underfloor heating systems

### Benefits

- very good resistance to very high mechanical and chemical wear
- very good filling capacity
- extremely matte look
- very good levelling
- solvent-free
- ÖNorm 2354 stress category C

Item no.	Package size	Gloss value	Consumption	GISCODE
73699	2 x 4 l + 2 x 1 l	special matte	approx. 80 ml / m <sup>2</sup>	W1 / DD




# PALL-X FILLER

## FILLER

Water-based, fibre-reinforced joint filler with innovative and patented fibre technology. Due to very good stability and low slump and shrinkage in the joint, often a “one fill” application is enough - even with wider joints up to 3 mm. PALL-X FILLER also performs well across larger floor areas compared to conventional filler, thanks to long processing time and good “sandability”.



### PALL-X FILLER in comparision:

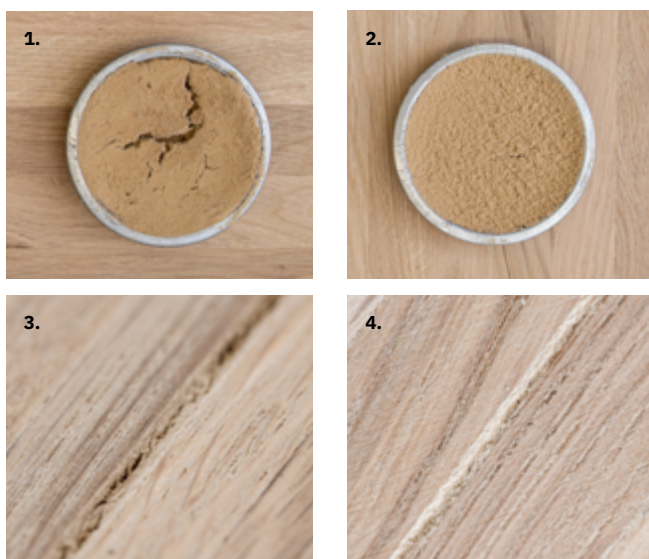

1. conventional filler
2. PALL-X FILLER
3. not fibre-reinforced
4. fibre-reinforced

### Suitable for


- sanded wood floors
- woodblocks
- use over underfloor heating systems

### Benefits

- fibre-reinforced
- very good stability in the wood floor joint
- very fast drying
- very good adhesion for joints up to approx. 3 mm
- high color fastness
- long processing time
- very easily seen on the wood surface
- does not clog abrasives
- suitable for all common wood species

Item no.	Package size	Consumption	GISCODE
162032	5 l	approx. 60 – 120 ml / m <sup>2</sup>	W2+



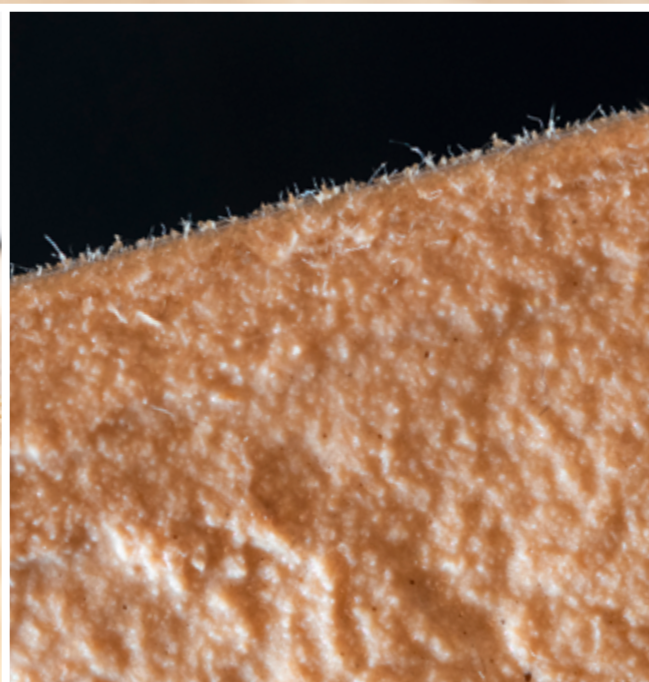

”

**With the patented fibre technology PALL-X FILLER also fills wider joints reliably in a one fill application. And with its long processing time, you can cover larger floor areas compared to conventional fillers. That's what convinced me.**

Jan Kohler,  
PALLMANN Technician and Product Development  
Würzburg



## PALL-X KITT FILLER

Water-based joint filler with good filling capacity.

### Suitable for

- sanded wood floors
- woodblocks
- use over underfloor heating systems

### Benefits

- very fast drying
- good adhesion for joints up to approx. 2mm
- holds well in joints
- very high color fastness
- visible on the wood floor surface
- will not clog abrasives
- suitable for all standard types of wood



Item no.	Package size	Consumption	GISCODE
12732	5 l	approx. 50 – 100 ml / m <sup>2</sup>	W3+



## PALL-X GEL INTERCOAT PRIMER

Water-based, 1-component wood floor special gel for a brilliant surface.

### Suitable for

- sanded wood floors
- use over underfloor heating systems

### Benefits

- good filling capacity
- fast drying
- able to be coated with PALL-X lacquers
- supports a perfect surface appearance



Item no.	Package size	Consumption	GISCODE
12570	1 l	approx. 20 ml / m <sup>2</sup>	W2+



## PALL-X 350 2-COMPONENT BONDING AGENT

Water-based, 2-component, polyurethane bonding agent for recoating sealed or oiled wood floors without intermediate sanding.

### Suitable for

- oiled and sealed wood floors
- use over underfloor heating systems

### Benefits

- fast drying
- very good adhesion on a variety of surfaces



Item no.	Package size	Consumption	GISCODE
60022	0,75 + 0,25 l	approx. 20 – 35 ml / m <sup>2</sup>	W3 / DD+





# PALL-X 325

## PRIMER

Water-based, 1-component, roller applied primer, for highly absorbent wood floor surfaces to prevent side bonding.

### Suitable for

- sanded wood floors
- use over underfloor heating systems

### Benefits

- fast drying
- uniform bright appearance
- strong color enhancement
- minimizes side bonding



Item no.	Package size	Consumption	GISCODE
13267	5 l	approx. 100 ml / m <sup>2</sup>	W2+



# PALL-X 320

## PRIMER

Water-based, 1-component, roller or trowel applied primer.

### Suitable for

- sanded wood floors
- use over underfloor heating systems

### Benefits

- uniform bright appearance
- low color enhancement
- minimizes side bonding



Item no.	Package size	Consumption	GISCODE
14289	5 l	approx. 60 – 100 ml / m <sup>2</sup>	W2+



# PALL-X 330

## PRIMER

Water-based, solvent-free, 1-component, roller applied primer in the versions OAK, PURE and WHITE.

### Suitable for

- sanded wood flooring
- use on wood floors installed over warm water underfloor heating systems

### Benefits

- fast drying
- clean appearance
- very good color enhancement in version OAK
- raw wood effect in PURE version
- whitewashed look in WHITE version
- minimizes edge-bonding



Item no.	Package size	Color	Consumption	GISCODE
038823	5 l	OAK*	approx. 80 ml / m <sup>2</sup>	W1
159665	5 l	PURE	approx. 80 ml / m <sup>2</sup>	W1
162837	5 l	WHITE	approx. 80 ml / m <sup>2</sup>	W1



\* Specially developed for oak wood floors.


# PALL-X 333

## 2-COMPONENT OIL PRIMER

Solvent-free, 2-component wood floor primer for all standard European wood types under the 2-component wood floor lacquers PALL-X 98, PALL-X ZERO 2K or under the 2-component wood floor oil MAGIC OIL 2K ORIGINAL. By adding PALL-X 333 C COLOR CONCENTRATE as the third component, wood floors can be primed and colored in one application.



### System recommendation

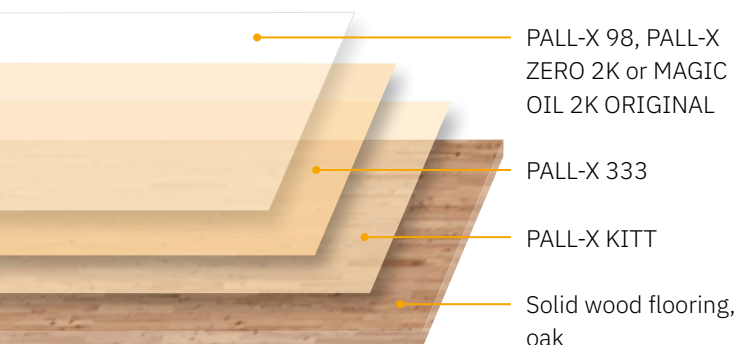

### Suitable for

- sandePextion Cfl-s1\*\*

Item no.	Package size	Color	Consumption	GISCODE
68044	0,8 + 0,2 l	neutral	approx. 25 – 50 ml / m²*	Ö10 / DD+



### PALL-X 333 COLOR WHITE\*\*\*

Item no.	Package size	Color	Consumption	GISCODE
73208	0,8 + 0,2 l	white	approx. 25 – 50 ml / m²*	Ö10 / DD+




Chemical hardening can vary greatly depending on climatic conditions and surface conditions. The current product data sheet is to be observed. Recoat after 12 hours (using PALL-X 333 COLOR white or PALL-X 333 C COLOR CONCENTRATE 24 hours) with PALL-X 98, PALL-X ZERO 2K or MAGIC OIL 2K ORIGINAL.

\* Consumption and drying time may vary depending on the absorbency and surface condition of the type of wood or parquet to be oiled.

\*\* Lacquer PALL-X 98, minimum thickness of wood 19 mm, gross density at 480 kg/m³, wood moisture 9%.

\*\*\* Seal with PALL-X 98 or PALL-X ZERO 2K.

**Important NOTE:** Sanding dust from oxygen-drying systems are self-igniting. Risk of fire! After completion of the sanding work, the accumulated sanding dust must be watered and disposed of in a tightly closed container! Contact with the product with pads or textile materials creates the risk of spontaneous combustion. Therefore soaked rags, pads or similar should be soaked with water and store in tightly closed containers..

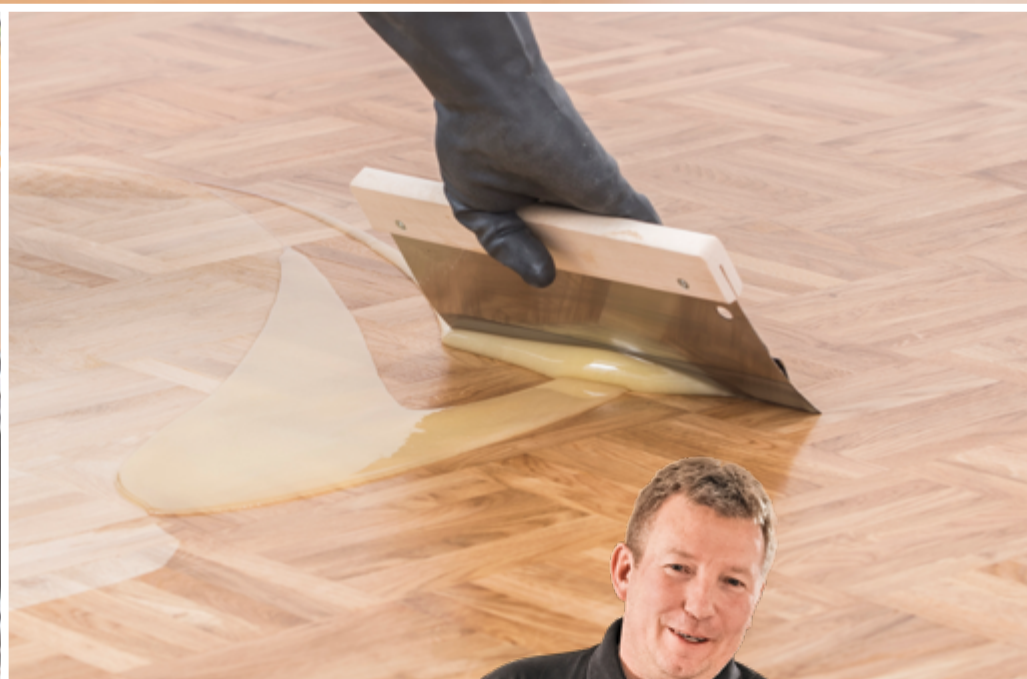

”

**To give the wood greater color enhancement, I recommend that you waterpop the wood floor surface before applying PALL-X 333 to achieve a real "wow effect".**

Peter Roberg,  
PALLMANN Sales Manager Sweden




# PALL-X 333 C

## COLOR CONCENTRATE

Colored concentrate of liquid oils and pigments for addition as third component in PALL-X 333. The combination of PALL-X 333 and PALL-X 333 C COLOR CONCENTRATE results in PALL-X 333 COLOR and is suitable for priming and simultaneous coloring of many common European woods, especially oak, ash, pine. The surface designed in this way can be reworked with the 2-component wood floor lacquers PALL-X 98, PALL-X ZERO 2K as well as with the 2-component wood floor oil MAGIC OIL 2K ORIGINAL.



### Aufbauempfehlung

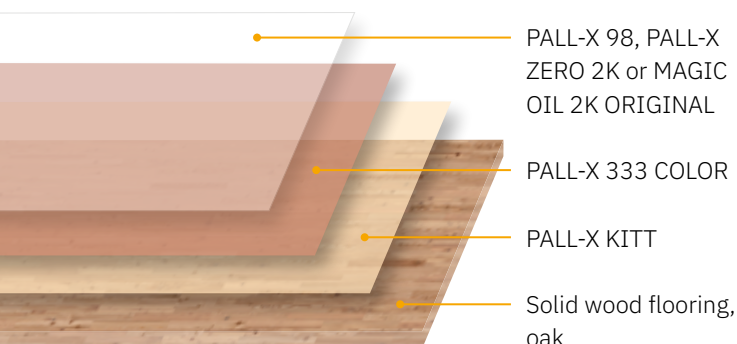

### Suitable for

- sanded wood floors
- use over underfloor heating systems

### Benefit

- emphasizes the color and structure of the wood
- coloring of all common European woods

Item no.	Package size	Color
83285	0,2 l	Nr. 1 Secret Green
83288	0,2 l	Nr. 3 Balanced Oak
83290	0,2 l	Nr. 5 Victorian Bronze
83318	0,2 l	Nr. 6 Havana Brown
83292	0,2 l	Nr. 8 Stylish Chestnut
83294	0,2 l	Nr. 10 Rich Brown
83297	0,2 l	Nr. 12 Pretty Pink
83299	0,2 l	Nr. 14 Smoked Oak
83301	0,2 l	Nr. 17 Happy Yellow
83306	0,2 l	Nr. 22 Between Brown
83307	0,2 l	Nr. 23 Weathered Grey
83308	0,2 l	Nr. 24 Sober White

Art.-Nr.	Package size	Color
83309	0,2 l	Nr. 25 Covered Grey
83312	0,2 l	Nr. 28 Exotic Brown
83313	0,2 l	Nr. 29 Elegant Walnut
83315	0,2 l	Nr. 30 Classic Red
83316	0,2 l	Nr. 31 Mystic Blue
83317	0,2 l	Nr. 32 Denim Blue
84564	0,2 l	Nr. 33 Black
84565	0,2 l	Nr. 34 Grey
84566	0,2 l	Nr. 35 Dark Brown
163673	0,2 l	Nr. 44 Chocolate Brown
163674	0,2 l	Nr. 45 Just Grey



**Note:** Due to the physical properties of white, it is still available as 1 l PALL-X 333 COLOR WHITE.





White\*




Sober White



Weathered Grey



Covered Grey



Chocolate Brown



Between Brown



Happy Yellow



Balanced Oak




Smoked Oak



Stylish Chestnut



Pretty Pink



Rich Brown



Classic Red




Victorian Bronze




Secret Green



Mystic Blue




Denim Blue




Grey




Just Grey



Elegant Walnut



Exotic Brown



Havana Brown



Dark Brown



Black

\* PALL-X 333 COLOR WHITE

**Please note:** The illustrated color patterns are for sample purposes only, actual results on individual wood species will vary. For best results we recommend that you apply the desired color on each wood flooring project. PALLMANN has created specially designed applicators to aid in the sample process with our PALLMANN COLOR COLLECTION.

”

**Whether your customers prefer Vintage, Classic, Minimalistic or Colorful, with the PALLMANN COLOR COLLECTION you can design wood floors individually. Through the sample box you get a great impression of all the shades.**

Mike Hamer,  
PALLMANN Sales Manager UK



## PALL-X 333 COLOR TESTER

### COLOR TESTER

Liquid color samples for all colors of the **PALLMANN COLOR COLLECTION**. With the practical tester, the color can easily be applied on a wood pattern or on a test surface. The **PALL-X 333 COLOR TESTER** assists with the color selection and additionally gives the assurance that the selected shade in combination with the chosen wood gives the desired surface appearance.



Item no.	Package size	Color	Item no.	Package size	Color
83530	0,1 l	Nr. 1 Secret Green	83553	0,1 l	Nr. 24 Sober White
83533	0,1 l	Nr. 3 Balanced Oak	83555	0,1 l	Nr. 25 Covered Grey
83535	0,1 l	Nr. 5 Victorian Bronze	83558	0,1 l	Nr. 28 Exotic Brown
83563	0,1 l	Nr. 6 Havana Brown	83559	0,1 l	Nr. 29 Elegant Walnut
83538	0,1 l	Nr. 8 Stylish Chestnut	83560	0,1 l	Nr. 30 Classic Red
83540	0,1 l	Nr. 10 Rich Brown	83561	0,1 l	Nr. 31 Mystic Blue
83542	0,1 l	Nr. 12 Pretty Pink	83562	0,1 l	Nr. 32 Denim Blue
83544	0,1 l	Nr. 14 Smoked Oak	84756	0,1 l	Nr. 33 Black
83657	0,1 l	Nr. 15 White	84757	0,1 l	Nr. 34 Grey
83546	0,1 l	Nr. 17 Happy Yellow	84758	0,1 l	Nr. 35 Dark Brown
83551	0,1 l	Nr. 22 Between Brown	163670	0,1 l	Nr. 44 Chocolate Brown
83552	0,1 l	Nr. 23 Weathered Grey	163671	0,1 l	Nr. 45 Just Grey

## PALLMANN COLOR COLLECTION STYLEBOX

### SAMPLE BOX

High-quality sample box made of wood for the presentation of the **PALLMANN COLOR COLLECTION**. The **STYLEBOX** contains a sample wooden board and a bottle of **PALL-X 333 COLOR TESTER** for each color. Sample boards and test bottles help with customer advice and provide additional security in color selection.



Item no.	Included items
84260	24 x sample boards, presentation plate for sample boards, 25 x PALL-X 333 COLOR TESTER






# PALLMANN FREESTYLE COLLECTION

## COLORSYSTEM

The **PALLMANN FREESTYLE COLLECTION** is a technically demanding system for real wood floor artists. Structured wood floor surfaces can be transformed into impressive surfaces with an original, two-tone look using the special colored oil primer **PALL-X 333 COLOR**, the completely new developed **PALL-X COLOR EFFECT** color filler and the 2-component lacquer **PALL-X 98**.



An innovative system for creating breathtaking, unique wood floor surfaces.

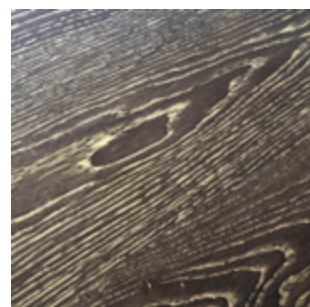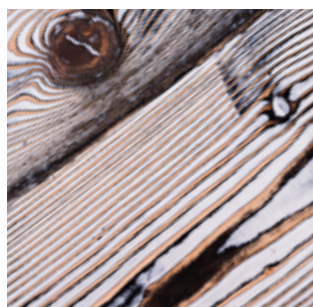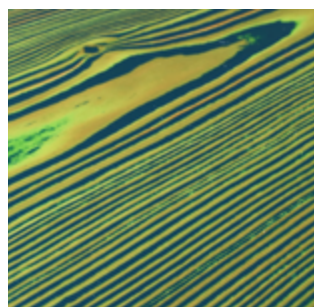

The system's twelve trend colors offer wood floor virtuosos and freestylers creative freedom to create inimitable works of art.




# PALL-X 98

## 2-COMPONENT LACQUER

Water-based, 2-component wood floor lacquer for heavily used wood floors in residential and commercial areas, including industrial wood floors. The very good flow properties guarantee easy application and ensure an impressive and maintenance-friendly surface.



### System recommendation

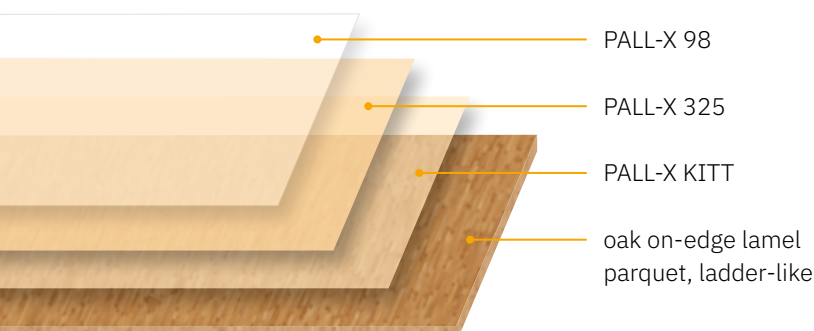

### Suitable for

- sanded wood floors
- woodblocks
- use over underfloor heating systems

### Benefits

- very good resistance to extreme mechanical and chemical wear
- very good filling capacity
- very fast drying and final strength
- very good flow properties
- extremely high abrasion resistance
- ÖNorm 2354 stress category C
- slip resistance R9 in combination with PALL-X GRIP R10\*\*
- DIN EN 71-3 (safety of toys Part 3: Migration of certain elements)
- Fire protection Cfl-s1\*

Item no.	Package size	Gloss value	Consumption	GISCODE
10093	4,5 + 0,45 l	semi-gloss	approx. 100 ml / m <sup>2</sup>	W2 / DD+
10094	4,5 + 0,45 l	matte	approx. 100 ml / m <sup>2</sup>	W2 / DD+
10100	4,5 + 0,45 l	gloss	approx. 130 ml / m <sup>2</sup>	W2 / DD+

\* Primer PALL-X 333, minimum thickness of wood 19 mm, gross density at 480 kg/m<sup>3</sup>, wood moisture 9%.

\*\* Application of PALL-X GRIP for PALL-X 98 semi-matte and matte.







”

**I see the matter with 2-component lacquer systems quite relaxed. Certainly, it needs a little more tact. But with PALL-X 98 you have the advantage of really fabulous gradient properties. Do not panic!**

Klaus-Dieter Achtsnit,  
PALLMANN Sales Manager Austria



# PALL-X 96

## LACQUER


**Water-based, fast drying, 1-component wood floor and cork flooring lacquer. For residential and commercial areas.**




### Application and drying phase

The very long and forgiving open time and subsequent rapid drying offer contractors security in a beautifully consistent finish with major time savings. Drying times are greatly reduced to only 1.5 – 2 hours before intercoat abrasion.

#### Application phase

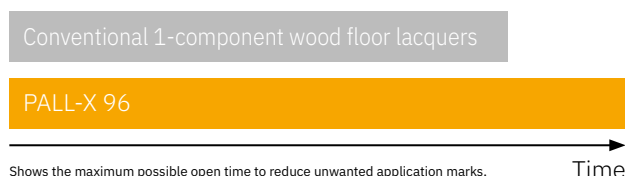

#### Drying phase

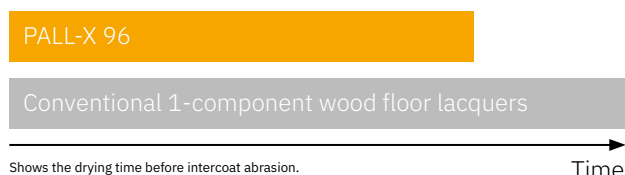

### Suitable for

- sanded wood floors
- untreated natural cork
- use over underfloor heating systems

### Benefits

- very good resistance to high mechanical and chemical wear
- very good filling and levelling
- very fast drying
- high abrasion resistance
- slip resistance R9
- DIN EN 71-3 (safety of toys Part 3: Migration of certain elements)

Item no.	Package size	Gloss value	Consumption	GISCODE
13271	5 l	semi-gloss	approx. 100 ml / m <sup>2</sup>	W2+
13697	5 l	matte	approx. 100 ml / m <sup>2</sup>	W2+







”

**Cool running – that is how it works in life.  
In life and on the job site. When everything  
needs to run smoothly, you can confidently  
rely on the qualities of our classic PALL-X 96.  
But don't take our word for it...**

Edmond Gontran,  
PALLMANN Sales Director France



## PALL-X 94

### LACQUER

**Water-based, 1-component wood floor lacquer for residential wood floors.**

#### Suitable for

- sanded wood floors
- use over underfloor heating systems

#### Benefits

- good resistance to high mechanical and chemical wear
- good filling capacity
- fast drying



Item no.	Package size	Gloss value	Consumption	GISCODE
13269	5 l	semi-gloss	approx. 100 ml / m <sup>2</sup>	W2+



## PALL-X PURE

### 2-COMPONENT LACQUER

**Water-based, 2-component wood floor lacquer for high traffic residential and commercial wood floors. PALL-X PURE creates an extremely matte look to untreated wood floors, inhibits the natural yellowing in wood floors and provides the so-called raw wood effect.**

#### Suitable for

- sanded wood floors
- use over underfloor heating systems

#### Benefits

- good resistance to high mechanical and chemical wear
- very good filling capacity
- extremely matte look
- raw wood effect
- fast drying and final strength
- very good flow properties
- wood-yellowing inhibiting



Item no.	Package size	Gloss value	Consumption	GISCODE
10108	4,5 + 0,45 l	special matte	approx. 80 ml / m <sup>2</sup>	W3 / DD+



## PALL-X SPORT 2K

### 2-COMPONENT LACQUER

**Water-based, 2-component wood floor lacquer for heavily used wood floors in the sports facilities. PALL-X SPORT 2K achieves the coefficient of sliding friction according to DIN 18032 and EN 14904 and corresponds to ÖNorm 2354 stress category C.**

#### Suitable for

- wood flooring in indoor sports facilities

#### Benefits

- very good resistance to extreme mechanical and chemical wear
- very good filling capacity
- fast drying and final strength
- high elasticity
- extremely high abrasion resistance



Item no.	Package size	Gloss value	Consumption	GISCODE
10103	4,5 + 0,45 l	semi-gloss	approx. 100 ml / m <sup>2</sup>	W2 / DD+





## SPORT-COLOR 2K

### COURT LINING

Water-based court lining for sports floors.

#### Benefits

- very high resistance to mechanical and chemical wear
- high filling capacity
- fast drying



Item no.	Package size	Color	Consumption	GISCODE
79311	1 + 0,1 l	Zinc Yellow	approx. 10 – 12 ml / lfm at 5 cm line width	W3 / DD+
79312	1 + 0,1 l	Pure Orange	approx. 10 – 12 ml / lfm at 5 cm line width	W3 / DD+
79313	1 + 0,1 l	Fire Red	approx. 10 – 12 ml / lfm at 5 cm line width	W3 / DD+
79314	1 + 0,1 l	Gentian Blue	approx. 10 – 12 ml / lfm at 5 cm line width	W3 / DD+
79315	1 + 0,1 l	Light Blue	approx. 10 – 12 ml / lfm at 5 cm line width	W3 / DD+
79316	1 + 0,1 l	Fern Green	approx. 10 – 12 ml / lfm at 5 cm line width	W3 / DD+
79317	1 + 0,1 l	Traffic White	approx. 10 – 12 ml / lfm at 5 cm line width	W3 / DD+
79318	1 + 0,1 l	Traffic Black	approx. 10 – 12 ml / lfm at 5 cm line width	W3 / DD+



## PALL-X RETARDER

### RETARDER

Additive to extend the working times of PALL-X lacquers.

#### Suitable for

- all water-based PALL-X lacquers

#### Benefits

- additive for expanding the open time of applications with regard to unsuitable climatic conditions (between 15 – 30 °C at 25 – 65 % relative humidity)



Item no.	Package size	Consumption
13275	1 l	max. 5 % of the lacquer amount



## PALL-X GRIP

### SLIP RESISTANCE

Structure powder to achieve slip resistance R10 according to DGUV norm 108-003 at PALL-X 98.

#### Suitable for

- PALL-X 98 in gloss value semi-gloss or matte

#### Benefits

- increase of slip resistance



Item no.	Package size	Consumption
82319	75 g	75 g on 4,95 l PALL-X 98


# MAGIC OIL 2K ERGO

## 2-COMPONENT OIL

**Solvent-free, 2-component wood floor oil with natural oils and waxes. The addition of a crosslinking hardener assists in ensuring the drying process. A convenient ergonomic working tool is provided through the MAGIC OIL APPLICATOR.**



### System recommendation

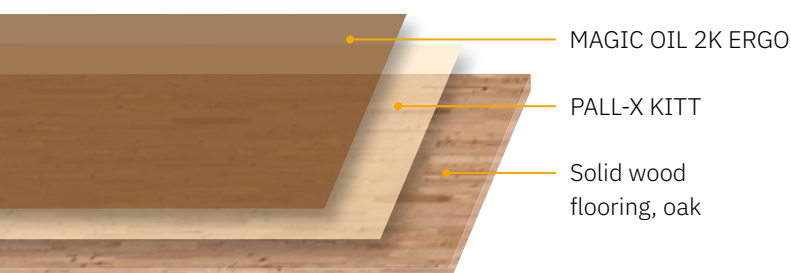

### Suitable for

- sanded wood floors
- woodblocks
- use over underfloor heating systems

### Benefits

- very good resistance to mechanical and chemical wear
- enhances the color and structure of the wood
- ergonomic working posture with the MAGIC OIL APPLICATOR
- one working step is saved compared to the conventional process
- slip resistance R10/DIN 51130
- DIN 53160 (resistance to saliva and sweat)
- EN 71-3 (Safety of toys Part 3: Migration of certain elements)

Item no.	Package size	Consumption	GISCODE
68018	0,91 + 0,09 l	approx. 40 – 60 ml / m <sup>2</sup> *	Ö10/DD+
55895	2,5 + 0,25 l	approx. 40 – 60 ml / m <sup>2</sup> *	Ö10/DD+



\* Exact consumption may vary strongly with the porosity and the surface structure of the treated wood type.

**Important Note:** Sanding dusts from oxygen-drying systems are self-igniting. Risk of fire! After completion of the sanding work, the accumulated sanding dust must be watered and disposed of in a tightly closed container! Contact with the product with pads or textile materials creates the risk of spontaneous combustion. Therefore soaked rags, pads or similar moisten with water and store/dispose in tightly closed containers.



”

**Applying oil on your hands and knees is eliminated with the ease of use of MAGIC OIL 2K ERGO. It's easy to apply with the applicator for results that will leave areas beautiful.**

Heinrich Gaier,  
PALLMANN International Technician



# MAGIC OIL 2K ORIGINAL

## 2-COMPONENT OIL

**Solvent-free, 2-component wood floor oil with natural oils and waxes, oxidatively drying and cross-linking by the addition of the hardener component.**

### Suitable for

- sanded wood floors
- use over underfloor heating systems

### Benefits

- very fast drying
- very good resistance to mechanical and chemical wear
- emphasizes the color and structure of the wood
- slip resistance R10 / DIN 51130
- DIN 53160 (resistance to saliva and sweat)
- EN 71-3 (Safety of toys Part 3: Migration of certain elements)
- Fire protection Cfl-s1\*\*



Item no.	Package size	Consumption	GISCODE
21283	0,91 + 0,09 l	approx. 25 – 50 ml / m <sup>2</sup> *	Ö10/DD+
21284	2,5 + 0,25 l	approx. 25 – 50 ml / m <sup>2</sup> *	Ö10/DD+

\* Exact consumption may vary strongly with the porosity and the surface structure of the treated wood type.

\*\* Minimum thickness of wood 19 mm, gross density at 480 kg/m<sup>3</sup>, wood moisture 9%.

**Important note:** Sanding dusts from oxygen-drying systems are self-igniting. Risk of fire! After completion of the sanding work, the accumulated sanding dust must be watered and disposed of in a tightly closed container! Contact with the product with pads or textile materials creates the risk of spontaneous combustion. Therefore soaked rags, pads or similar moisten with water and store/dispose in tightly closed containers.

# MAGIC OIL 2K WHITE

## 2-COMPONENT OIL

**Solvent-free, 2-component wood floor oil with natural oils and waxes. The addition of a crosslinking hardener assists in ensuring the drying process.**

### Suitable for

- sanded wood floors
- woodblocks
- use over underfloor heating systems

### Benefits

- very good resistance to mechanical and chemical wear
- enhances the structure of the wood with the color white
- slip resistance R10/DIN 51130
- DIN 53160 (resistance to saliva and sweat)
- EN 71-3 (Safety of toys Part3: Migration of certain elements)



Item no.	Package size	Consumption	GISCODE
159671	0,8 + 0,2 l	approx. 25 – 50 ml / m <sup>2</sup> *	Ö10/DD+

\* Exact consumption may vary strongly with the porosity and the surface structure of the treated wood type.

**Important note:** Sanding dusts from oxygen-drying systems are self-igniting. Risk of fire! After completion of the sanding work, the accumulated sanding dust must be watered and disposed of in a tightly closed container! Contact with the product with pads or textile materials creates the risk of spontaneous combustion. Therefore soaked rags, pads or similar moisten with water and store/dispose in tightly closed containers.





## MAGIC OIL 2K SPA

### 2-COMPONENT OIL

**Solvent-free, 2-component wood floor oil with natural oils and waxes, oxidatively drying and cross-linking by the addition of the hardener component. MAGIC OIL 2K SPA was specially developed for use in wet areas.**

#### Suitable for

- sanded wood floors
- wood floors in wet rooms
- use over underfloor heating systems

#### Benefits

- very good resistance to mechanical and chemical wear
- evaluation group B according to DIN 51097 (slip resistance in barefoot area)
- slip resistance R10/DIN 51130
- DIN 53160 (resistance to saliva and sweat)
- EN 71-3 (Safety of toys Part 3: Migration of certain elements)



Item no.	Package size	Consumption	GISCODE
55898	0,8 + 0,2 l	approx. 25 – 50 ml / m <sup>2</sup> *	Ö10/DD+



\* Exact consumption may vary strongly with the porosity and the surface structure of the treated wood type.

**Important note:** Sanding dusts from oxygen-drying systems are self-igniting. Risk of fire! After completion of the sanding work, the accumulated sanding dust must be watered and disposed of in a tightly closed container! Contact with the product with pads or textile materials creates the risk of spontaneous combustion. Therefore soaked rags, pads or similar moisten with water and store/dispose in tightly closed containers.

## MAGIC OIL 1K EASY

### 1-COMPONENT OIL

**Solvent-free, 1-component wood floor oil with natural oils and waxes which ensures an “open-pore” surface, allowing the wood to “breathe” i. e. to absorb or release humidity.**

#### Suitable for

- sanded wood floors
- use over underfloor heating systems

#### Benefits

- emphasizes the color and structure of the wood
- resistant to household chemicals



Item no.	Package size	Consumption	GISCODE
84923	1 l	approx. 25 – 50 ml / m <sup>2</sup> *	Ö10+
79521	3 l	approx. 25 – 50 ml / m <sup>2</sup> *	Ö10+



\* Exact consumption may vary strongly with the porosity and the surface structure of the treated wood type.

**Important note:** Sanding dusts from oxygen-drying systems are self-igniting. Risk of fire! After completion of the sanding work, the accumulated sanding dust must be watered and disposed of in a tightly closed container! Contact with the product with pads or textile materials creates the risk of spontaneous combustion. Therefore soaked rags, pads or similar moisten with water and store/dispose in tightly closed containers.

## ECO OIL 1K

### 1-COMPONENT OIL

**Solvent-free, 1-component, rollable oil in three versions PURE, WHITE and NEUTRAL. Due to the very fast drying, complete coating of the surface is possible in only one day.**

#### Suitable for

- sanded wood floors
- use over underfloor heating systems

#### Eigenschaften

- easy to apply with the APPLICATION ROLLER for water-based lacquers
- very fast drying
- clean appearance
- can be over coated



Item no.	Color	Package size	Consumption
86227	PURE	1 l	approx. 80 ml / m <sup>2</sup>
85796	PURE	5 l	approx. 80 ml / m <sup>2</sup>
86228	WHITE	1 l	approx. 80 ml / m <sup>2</sup>
85798	WHITE	5 l	approx. 80 ml / m <sup>2</sup>
86229	NEUTRAL*	1 l	approx. 80 ml / m <sup>2</sup>
86122	NEUTRAL*	5 l	approx. 80 ml / m <sup>2</sup>



\* Specially developed for oak wood floors.


# PALLMANN X-LIGHT SYSTEM

## UV

The PALLMANN X-LIGHT SYSTEM revolutionizes wood flooring technology. A unique system from the primer up to the lacquer allows the curing of the surface with ultraviolet light. This creates a very durable surface, which can be used immediately. The possibilities that are opened of this unique system are unimagined.



### Aufbauempfehlung

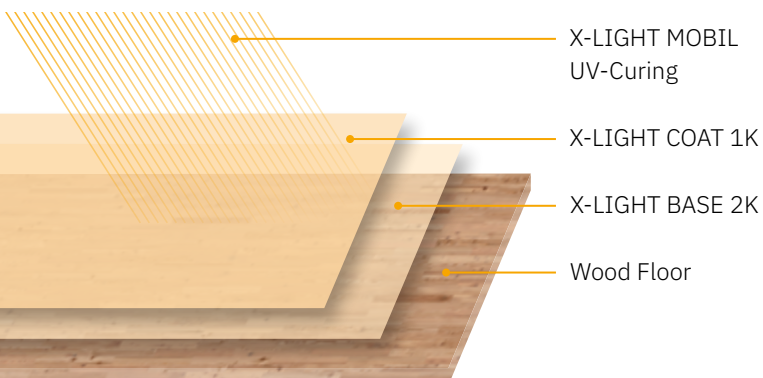

A simple system with a phenomenal effect. Products specially adapted to UV-curing and the PALLMANN X-LIGHT-MOBILE guarantee the perfect surface structure. Renovation, refurbishment, working under time pressure, the PALLMANN X-LIGHT SYSTEM has proven itself and saves time and money.



”

**When it has to be fast and robust, the PALLMANN X-LIGHT SYSTEM is always my first choice. It's like speeding up time.**

Tony Martin,  
PALLMANN Sales Manager France





## ALLBASE PRIMER

Alcohol-based, 1-component, roller applied primer.

### Suitable for

- sanded wood floors
- use over underfloor heating systems

### Benefits

- fast drying
- good color enhancement
- minimizes side bonding
- suitable for all PALLMANN lacquers



Item no.	Package size	Consumption	GISCODE
33839	5 l	approx. 60 ml / m <sup>2</sup>	G2



Solvent-based products are being increasingly restricted in accordance with TRGS 617 and do not correspond to our product philosophy. For this reason we recommend priming using PALL-X 320 or PALL-X 325.

## ALLKITT JOINT FILLER

Alcohol-based joint filler with good filling capacity.

### Suitable for

- sanded wood floors
- woodblocks
- use over underfloor heating systems

### Benefits

- very fast drying
- good adhesion for joints up to approx. 2 mm
- holds well in joints
- very high color fastness
- visible on the wood floor surface
- will not clog abrasives
- suitable for all standard types of wood



Item no.	Package size	Consumption	GISCODE
39948	5 l	approx. 100 ml / m <sup>2</sup>	G2



Solvent-based products are being increasingly restricted in accordance with TRGS 617 and do not correspond to our product philosophy. For this reason we recommend filling using PALL-X KITT or PALL-X FILLER.

## UNI-KITT JOINT FILLER

Solvent-based joint filler with good filling capacity.

### Suitable for

- sanded wood floors
- woodblocks
- use over underfloor heating systems

### Benefits

- very fast drying
- good adhesion for joints up to approx. 2 mm
- holds well in joints
- very high color fastness
- visible on the wood floor surface
- will not clog abrasives
- suitable for all standard types of wood



Item no.	Package size	Consumption	GISCODE
14258	5 l	approx. 140 ml / m <sup>2</sup>	G3



Solvent-based products are being increasingly restricted in accordance with TRGS 617 and do not correspond to our product philosophy. For this reason we recommend filling using PALL-X KITT or PALL-X FILLER.



## SH 81

### 2-COMPONENT LACQUER

Solvent-based, acid-curing, 2-component lacquer for wood flooring in areas exposed to very heavy wear. Slip-resistance value in accordance with EN 14904.

#### Suitable for

- sanded wood floors in very heavy wear areas

#### Benefits

- easy to apply
- long pot life
- roller, spray or trowel application



Item no.	Package size	Gloss value	Consumption	GISCODE
163260	4,5 l	semi-gloss	approx. 100 ml / m <sup>2</sup>	SH1
163262	0,45 l		approx. 100 ml / m <sup>2</sup>	SH1



Solvent-based products are being increasingly restricted in accordance with TRGS 617 and do not correspond to our product philosophy. For this reason we recommend sealing using PALL-X 98.

## HARDWAXOIL

### OIL

Solvent-based, 1-component hard wax oil for heavily used wood floors.

#### Suitable for

- sanded wood floors
- woodblocks
- wood floor on beam and swinging structures
- use over underfloor heating systems

#### Benefits

- good resistance to mechanical and chemical wear
- fast drying
- minimizes side bonding



Item no.	Package size	Consumption	GISCODE
80735	3 l	approx. 60 ml / m <sup>2</sup>	Ö 60



**Important note:** Sanding dusts from oxygen-drying systems are self-igniting. Risk of fire! After completion of the sanding work, the accumulated sanding dust must be watered and disposed of in a tightly closed container! Contact with the product with pads or textile materials creates the risk of spontaneous combustion. Therefore soaked rags, pads or similar moisten with water and store/dispose in tightly closed containers.

Solvent-based products are being increasingly restricted in accordance with TRGS 617 and do not correspond to our product philosophy. For this reason, we recommend the use of our ECO OIL 1K for oiling, moisten with water and store/dispose in tightly closed containers.

# **rz** TURBO PROTECT PLUS

## 2-COMPONENT SEALER FOR RESILIENT FLOORS

**Water-based, 2-component sealer for long-term protection with new installations and renovations of resilient floor covering surfaces.**



### Suitable for

Vinyl, PVC, CV, Linoleum, LVT`s, rubber (after obtaining special technical information by Application Technology/Sales)

### Benefits

- very low odour
- 2 component system for heavy duty use
- high yield due to high solid content
- time-saving and easy processing , only one application
- high resistance to hand disinfection
- slip resistance R9
- DIN 18032 (sports flooring)
- DIN 68861 (chemical resistance)
- DIN 53160 (resistance to saliva and sweat)
- DIN EN 71-3 (Safety of toys Part 3: Migration of certain elements)

Item no.	Package size	Gloss value	Consumption	Package	GISCODE
065731	4,5 l + 0,5l	matte	approx. 50 m <sup>2</sup>	1	W2/DD+/pH value: 8



### RZ GRIP ADDITIV

Item no.	Package size	Consumption	Package
082319	75 g	sufficient for 1 container of Turbo Protect Plus	4



## **rz** PUR CLEANER

### HIGHLY EFFECTIVE CLEANER FOR PU/PUR FLOORS

**Highly effective special cleaning agent, also for initial cleaning and for all floor coverings refined with PU/PUR at the factory or varnished subsequently with RZ Turbo Protect Plus, resilient floor coverings and linoleum.**

### Suitable for

- resilient floor coverings finished at the factory with PU/PUR or varnished subsequently with RZ Turbo Protect Plus and linoleum.
- laminate

### Benefits

- slip-resistant
- high dirt-dissolving properties
- cleaning without smears



Item no.	Package size	Package	Consumption per container	GISCODE
168887	750 ml	8	750 m <sup>2</sup>	GU 80/pH value: 8
168889	5 l	1	5.000 m <sup>2</sup>	GU 80/pH value: 8



## **rz** TURBO PROTECT EXTRA

### 2-COMPONENT SEALER FOR RESILIENT FLOORS

**Water-based, 2-component sealer for resilient floor covering surfaces with extreme resistance to disinfectants, plasticizers, dyes and chemicals.**

#### Suitable for

Vinyl, PVC, CV, Linoleum, LVT's, rubber (after obtaining special technical information by Application Technology/Sales)

#### Benefits

- very low odour
- 2 component system for heavy duty use
- high yield due to high solid content
- time-saving and easy processing, only one application
- extreme resistance to disinfectants, plasticizers, dyes and chemicals
- slip resistance R9
- DIN 18032 (sports flooring)
- DIN 68861 (chemical resistance)
- DIN 53160 (resistance to saliva and sweat)
- DIN EN 71-3 (Safety of toys Part 3: Migration of certain elements)



Item no.	Package size	Gloss value	Consumption	Package	GISCODE
163556	4 l + 1 l	matte	approx. 50 m <sup>2</sup>	1	W2/DD+/pH value: 8

\*To achieve R10 slip resistance, the addition of RZ Grip Additive is required. R11 additive is also available on request.



## **rz** ELASTIC SEALER

### SPECIAL SEALER FOR THE INITIAL CARE FOR RESILIENT FLOORS

**Polyurethane-refined special care for top requirements for the sealing of resilient floor coverings.**

#### Suitable for

Resilient floor coverings like PVC, CV, rubber, natural and artificial stone, Linoleum with factory-applied finish

#### Benefits

- ultra-tough, slip-resistant
- particularly abrasion-resistant long-term protection, extends the life span of the floor



Item no.	Package size	Gloss value	Consumption per container	Package	GISCODE
168882	750 ml	semi-gloss	14 m <sup>2</sup>	8	GG 20/pH value: 9
168884	5 l	semi-gloss	100 m <sup>2</sup>	1	GG 20/pH value: 9



## **rz** TURBO BASIC CLEANER

### HIGHLY ACTIVE SPECIAL CLEANER FOR RESILIENT FLOORS

**Highly active special cleaner for the removal of multi-layer and aged care agent layers on polymer base, which cannot or only partially removed with common basic cleaners. For professional commercial installers.**

#### Suitable for

- all waterproof, resilient types of floor covering; linoleum, PVC, CV, Polyolefin rubber floor covering
- natural and artificial stone
- on floor covering coated with PUR at the factory or subsequently by the contractor

#### Benefits

- quickly removes old coats of several layers, which cannot or only partially removed with common basic cleaners
- great dissolution capability, powerful and efficient



Item no.	Package size	Package	Consumption per container	GISCODE
168873	5 l	1	approx. 90 m <sup>2</sup>	GG 60/pH value: 10





# STRONG BELOW

**ADHESIVES**







# PALLMANN P6

## 1-COMPONENT PREMIUM STP WOOD FLOOR ADHESIVE

Hard, easy cleanup adhesive with a long working time for all common types of wood floors.

### Suitable for

- stab-wood flooring
- multi-ply/pre-finished wood flooring (engineered boards)
- on-edge wood flooring
- mosaic wood flooring
- solid wood planks
- exotic wood types\*

### Benefits

- very good filling capacity
- no swelling effect on wood floor
- versatile application
- fresh adhesive adheres to cured adhesive
- adhesive residues on wood flooring can be removed while fresh
- solvent-free



Item no.	Package size	Consumption	GISCODE
67689	16 kg	approx. 1.000 – 1.200 g / m <sup>2</sup>	RS10 / solvent-free

\* Obtain technical advice.

# PALLMANN P5

## 1-COMPONENT STP WOOD FLOOR ADHESIVE

Hard elastic adhesive for common wood floor types.

### Suitable for

- stab-wood flooring
- multi-ply/pre-finished wood flooring (engineered boards)
- on-edge wood flooring 15 – 22 mm
- multi-ply wood planks

### Benefits

- good filling capacity
- good ridge formation
- hard-elastic grooves
- long working time
- underfloor heating system suitable
- adhesive residues on wood flooring can be removed easily
- solvent-free



Item no.	Package size	Consumption	GISCODE
59679	16 kg	approx. 1.000 – 1.200 g / m <sup>2</sup>	RS10 / solvent-free

# PALLMANN P4

## 1-COMPONENT STP WOOD FLOOR ADHESIVE

Solvent-free, 1-component STP wood flooring adhesive.

### Suitable for

- multi-ply/pre-finished wood flooring (engineered boards) up to 2200 x 200 mm

### Benefits

- hard-elastic ridges
- very good ridge formation
- adhesive residues on the wood flooring surface can be removed
- solvent-free



Item no.	Package size	Consumption	GISCODE
73479	16 kg drum	approx. 1.000 – 1.200 g / m <sup>2</sup>	RS10 / solvent-free
87310	4 x 3,75 kg tubes	approx. 1.000 – 1.200 g / m <sup>2</sup>	RS10 / solvent-free
87538	12 x 600 ml tubes		RS10 / solvent-free



# PALLMANN P9

## 2-COMPONENT PUR WOOD FLOOR ADHESIVE

**Solvent- and water-free, 2-component wood floor adhesive with a very long working time.**

### Suitable for

- mosaic wood flooring
- stab-wood flooring
- 10 mm solid wood flooring
- wood planks in all formats
- woodblocks\*
- on-edge wood flooring 10 – 23 mm
- multi-ply/pre-finished woodflooring (engineered boards)
- smoked oak – in order not to cause bright joints we recommend UZIN COLOR MK

### Benefits

- good filling capacity
- good ridge formation
- easy spreadable
- shrinkage-free even in thick layers
- rapid setting
- elastically deformable
- high shear strength
- can be used directly on mastic asphalt
- universal wood floor adhesive
- solvent-free



Item no.	Package size	Consumption	GISCODE
69953	6,2 kg + 0,8 kg	approx. 800 – 1.200 g / m²	RU1 / solvent-free



\* Obtain technical advice.

# PALLMANN P104

## 1-COMPONENT PUR RAPID PRIMER

**Solvent-free, 1-component, reaction resin primer for wood floors and flooring work.**

### Suitable as

#### • Reverse primer:

- on untreated cement screeds or concrete up to a residual moisture content of 4 CM-% (on heated constructions up to 2.5 CM-%) with 2 – 3 layers

#### • System primer:

- before direct bonding with PALLMANN reactive resin adhesives

#### • Solidification primer:

- on unstable, porous or cracked surfaces

#### • Adhesion primer:

- on dense or pourous old substrates with adhesive or putty residues (for example synthetic resin, neoprene, bitumen or sulphite waste adhesives)
- on moisture-sensitive substrates (for example on chipboard and OSB boards, gypsum dry screed elements)
- on new mastic asphalt screeds
- in combination with UZIN PE 280 before leveling with UZIN cement or calcium sulphate leveling compounds
- on underfloor heating systems
- for the heavy duty in the residential, commercial and industrial sector

### Benefits

- fast drying
- very good penetration
- roller or trowel application
- barrier to 4 CM-%
- solvent-free



Item no.	Package size	Consumption	GISCODE
77315	6 kg	approx. 80 – 150 g / m²	RU1 / solvent-free
59654	12 kg	approx. 80 – 150 g / m²	RU1 / solvent-free



# BEST BASE

**SUBFLOOR PREPARATION**



# PALLMANN P25

## LEVELLING COMPOUND

**Self-levelling, high strength, cement floor levelling compound for wood flooring.**

### Suitable for

- the production of absorbent, high-strength installation surfaces for wood floors and laminate floors as well as for the decoupling documents UZIN Multimoll non-woven, Multimoll Top 4, 9 and 15, as well as Multimoll Softsonic 3 mm
- cement, calcium sulphate screeds, concrete, etc.
- mastic asphalt screeds (maximum 4 mm layer thickness)
- substrates with increased requirements for flatness according to DIN 18202, Tab.3, line 4 before wood flooring

Suitable as substrate for all PALLMANN wood floor adhesives, especially for the use of dispersion.

### Benefits

- very good flow properties
- good absorbency
- high tensile and shear strength
- very low tension
- fine surface
- for layer thicknesses of 3,0 – 20 mm



Art.-Nr.	Gebindegröße	Verbrauch	GISCODE
66227	25 kg	approx. 1,5 kg / m <sup>2</sup> pro mm thickness	ZP1 / low chromate content acc. Regulation (EC) No. 1907/2006



# UZUN<sup>®</sup> PE 360 PLUS

## READY-TO-USE PRIMER

**Dispersion primer for absorbent substrates, screeds and concrete floors.**

### Suitable

- on new cement and calcium sulphate screeds
- on precast concrete
- on and under mineral levelling compounds
- on dry concrete
- for wall applications on rendering, lime plaster and gypsum plasterboards

### Benefits

- penetrates well into the substrate, but also has film-forming properties
- high-speed construction product
- reduces the absorbency of the substrate
- for interior use
- solvent-free



Item no.	Package size	Consumption	GISCODE
65875	10 kg	approx. 80 – 150 g / m <sup>2</sup>	D1 / solvent-free



# UZUN<sup>®</sup> NC 182

## LOW-SLUMP, CEMENTITIOUS REPAIR MORTAR

**Moisture-resistant, low-slump, fine and very fast setting cement smoothing compound with reActivate-Effect.**

### Suitable

- for filling holes and surface damages
- for levels adjustment and patch smoothing work
- for fine skimming or area scratch-coating
- on all surfaces as a repair-, filling- and smoothing compound

### Benefits

- working time: 15 – 20 minutes\*
- set to foot traffic: after approx. 25 minutes\*
- ready for covering: after 60 minutes\*
- adjustable consistency
- resistant to alkaline humidity
- for interior use



Item no.	Package size	Consumption	GISCODE
68546	20 kg	1 mm: approx. 1,5 kg / m <sup>2</sup> 3 mm: approx. 4,5 kg / m <sup>2</sup> 10 mm: approx. 15 kg / m <sup>2</sup>	ZP1 / low chromate content acc. Regulation (EC) No. 1907/2006 (REACH)



\*At 20°C and 65% relative humidity.

# KEEP BEAUTIFUL

**CARE AND MAINTENANCE**







# MAGIC OIL CARE

## CARE OF OILED WOOD FLOORS

Maintenance care product for wood floors that have been oiled with products from the **MAGIC OIL LINE** or **SOYABASE PLUS**. **MAGIC OIL CARE** has components which produce a “topping up” effect. This effect provides lasting care and protection. Dependant on dilution and frequency of application during the maintenance programme, the intervals for deep cleaning and retreatment are extended.



### The right maintenance and cleaning is essential for wood floors.

PALLMANN provides current care instructions for sealed and oiled wood floors for delivery to your customers. The current versions are available at [www.good-for-wood.com](http://www.good-for-wood.com).



### Suitable for

- oiled wood floors impregnated with products of the **MAGIC OIL LINE**

### Benefits

- moisturizing effect
- sustainable care

Item no.	Package size	Maintenance / Consumption
21455	0,75 l	approx. 250 ml / 5 l of water until pure
34053	5 l	approx. 250 ml / 5 l of water until pure




### MAGIC OIL CARE WHITE

For floors which have been treated with **MAGIC OIL 2K WHITE**.

Item no.	Package size	Maintenance / Consumption
162390	0,75 l	approx. 250 ml / 5 l of water until pure





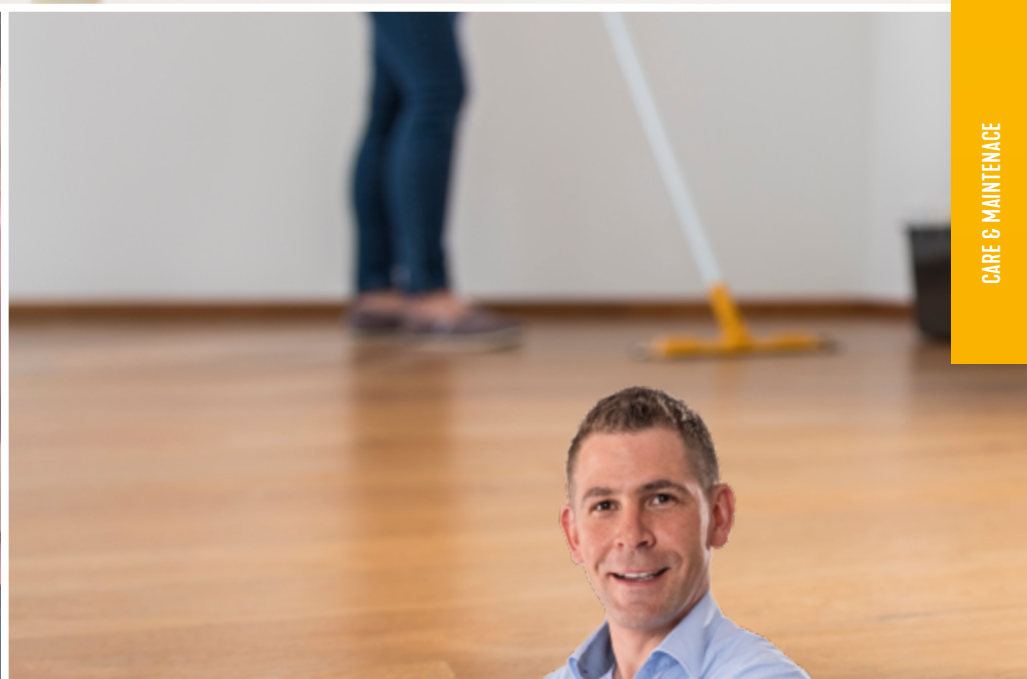

”

**Proper care extends the life of your floor immensely. MAGIC OIL CARE is the optimum care for oiled floors from PALLMANN. You can apply it diluted or pure, depending on your wood floors needs.**

Jochen Röck,  
Head of technical department PALLMANN



## FINISH CARE

### CARE FOR LACQUER

Water-based care-emulsion for initial care and maintenance cleaning.

#### Suitable for

- lacquered wood and cork floors
- multi-ply/pre-finished wood floors (engineered boards)
- linoleum
- PVC
- natural and artificial stone floors

#### Benefits

- fast drying
- durable
- no polishing necessary



Item no.	Package size	Gloss value	First application / Consumption	Maintenance / Consumption
12454	0,75 l	-	approx. 20 ml / m <sup>2</sup>	approx. 50 – 150 ml / 5 l water
12452	5 l	-	approx. 20 ml / m <sup>2</sup>	approx. 50 – 150 ml / 5 l water
12457	0,75 l	matte	approx. 20 ml / m <sup>2</sup>	approx. 50 – 150 ml / 5 l water
76843	5 l	matte	approx. 20 ml / m <sup>2</sup>	approx. 50 – 150 ml / 5 l water



## FINISH CARE STOP

### CARE FOR LACQUER

Water-based, care and cleaning product providing an anti-slip effect.

#### Suitable for

- lacquered wood and cork floors
- multi-ply/pre-finished wood floors (engineered boards)
- linoleum
- PVC
- natural and artificial stone floors

#### Benefits

- fast drying
- durable
- slip resistant
- no polishing necessary



Item no.	Package size	First application / Consumption	Maintenance / Consumption
12461	0,75 l	approx. 20 ml / m <sup>2</sup>	approx. 50 – 150 ml / 5 l water
12460	10 l	approx. 20 ml / m <sup>2</sup>	approx. 50 – 150 ml / 5 l water



## CLEAN

### CLEANING

Water-based cleaning agent for flooring.

#### Suitable for the basic cleaning of

- floors treated with PALLMANN oil and wax products

#### Benefits

- fast drying

#### Suitable also for the maintenance cleaning of

- lacquered wood and cork floors
- oiled and waxed wood floors
- lacquered or oiled and waxed multi-ply/pre-finished wood floors (engineered boards) floors
- linoleum
- PVC, natural and artificial stone floors



Item no.	Package size	Basic cleaning / Consumption	Maintenance / Consumption	ph value
13706	0,75 l	approx. 200 ml / 5 l water until pure*	approx. 50 – 100 ml / 5 l water	ca. 7
13707	10 l	approx. 200 ml / 5 l water until pure*	approx. 50 – 100 ml / 5 l water	ca. 7



\* The mixing ratio depends on the degree of soiling, from 200 ml to 5 liters of water until it is used alone. The exact details can be found in the care instructions for the MAGIC OIL line.



## CLEAN STRONG

### CLEANING FOR LACQUER

Water-based, basic cleaning agent thoroughly removing even strong contamination.

#### Suitable for

- lacquered wood and cork floors
- multi-ply/pre-finished wood floors (engineered boards)
- PVC
- natural and artificial stone floors

#### Benefits

- high dirt-dissolving power



Item no.	Package size	Consumption	ph value
13704	0,75 l	approx. 20 – 50 ml / 5 l water	approx. 10
13705	10 l	approx. 20 – 50 ml / 5 l water	approx. 10



## MAINTENANCE OIL

### CARE FOR OIL

Natural oil-wax combination with natural soybean oil for the care of wood floors.

#### Suitable for

- non-film-forming oxidatively drying oils/waxes
- oiled wood floors impregnated with products of the MAGIC OIL LINE

#### Benefits

- emphasizes the color and structure of the wood
- resistant to household chemicals



Item no.	Package size	Consumption	GISCODE
70264	1 l	approx. 20 – 40 ml / m <sup>2</sup> *	Ö60+



\*Exact consumption may vary strongly with the porosity and the surface structure of the treated wood type. Solvent-based products are being increasingly restricted in accordance with TRGS 617 and do not correspond to our product philosophy.

**Important Note:** Sanding dust from oxygen-drying systems are self-igniting. Risk of fire! After completion of the sanding work, the accumulated sanding dust must be watered and disposed of in tightly closed containers! Contact with the product with pads or textile materials creates the risk of spontaneous combustion. Therefore soaked rags, pads or similar moisten with water and store/dispose in tightly closed containers.

## ECO OIL CARE

### CARE FOR OIL

Care product for wood floors treated with PALLMANN ECO OIL 1K or PALLMANN HARDWAXOIL.

#### Suitable for

- regular use on wood floors treated with PALLMANN ECO OIL 1K or PALLMANN HARDWAXOIL

#### Benefits

- rapid drying
- hard wearing
- no mechanical polishing required




Item no.	Package size	First application / Consumption	Maintenance / Consumption
86116	0,75 l	approx. 20 – 30 ml / m <sup>2</sup>	approx. 250 ml / 5 l water
86117	5 l	approx. 20 – 30 ml / m <sup>2</sup>	approx. 250 ml / 5 l water



# INSIDE OUT

**OUTDOOR SYSTEM**

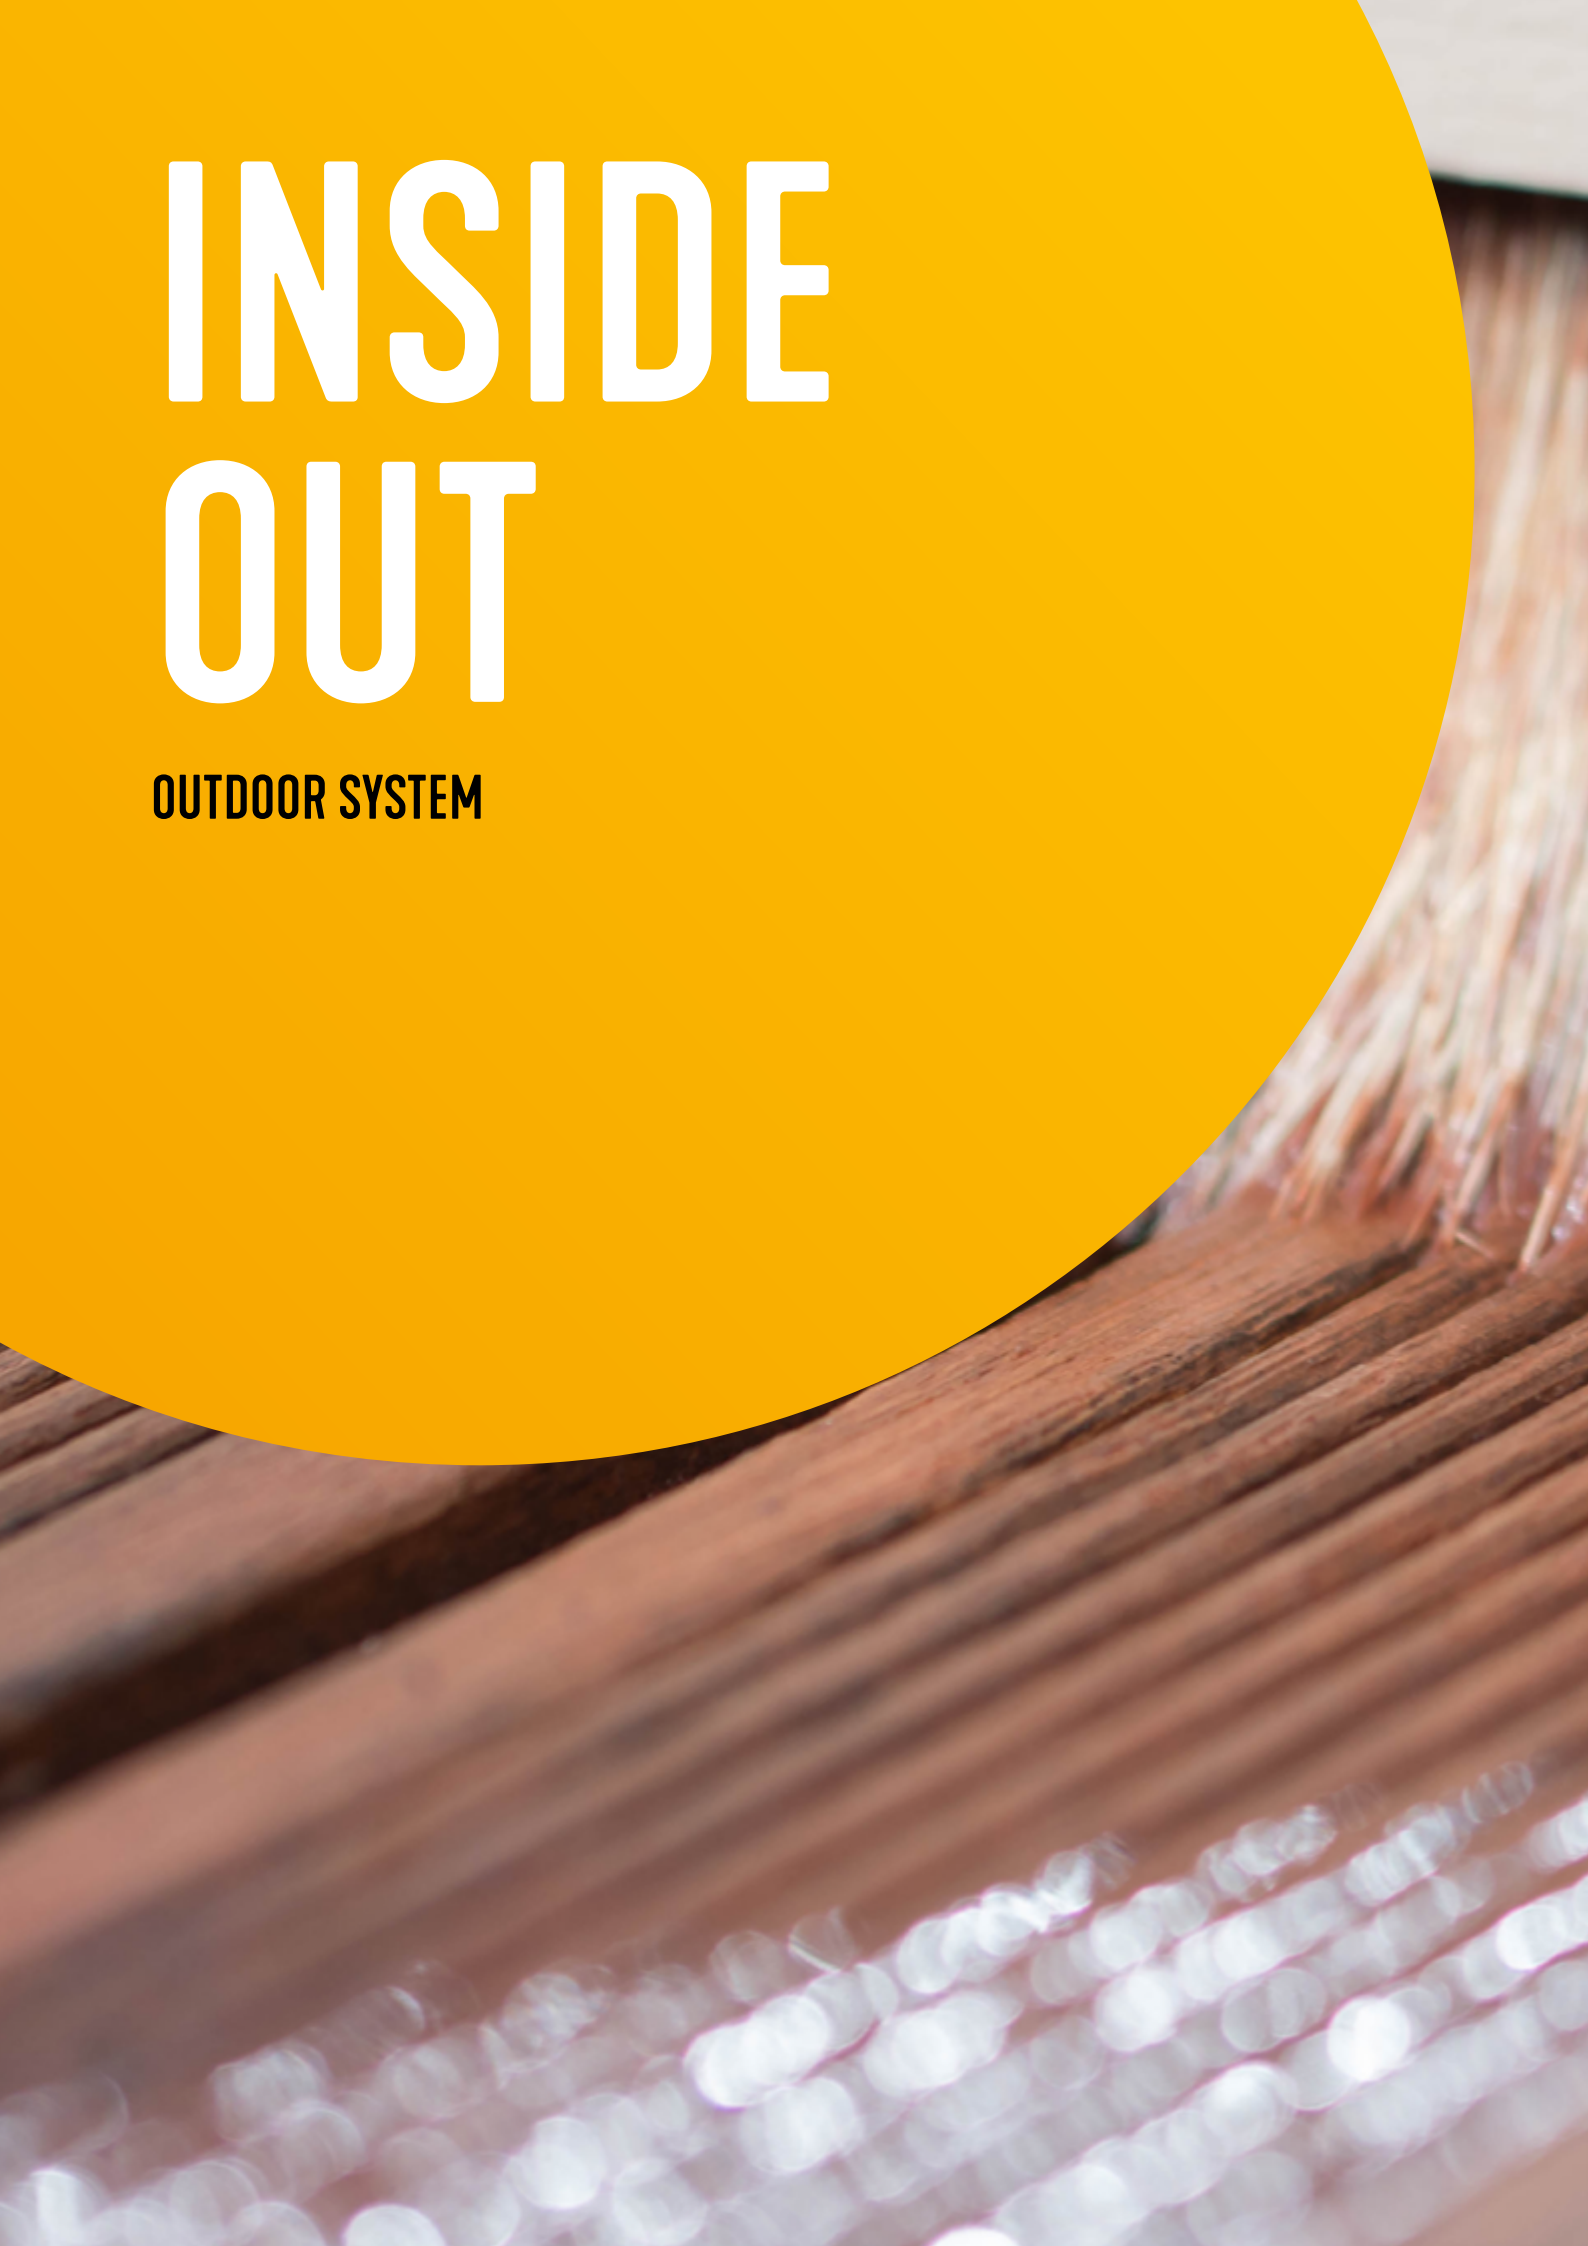





# OUTDOOR-OIL

## OIL

Solvent-based, 1-component decking oil for wood impregnation outdoors.

### Suitable for


- wooden terraces
- screen protection
- handrails and railings
- carports
- garden furniture

### Benefits

- brushable
- high elasticity



Item no.	Package size	Color	Consumption	GISCODE
81077	3 l	nature	approx. 50 – 60 ml / m <sup>2</sup> *	Ö60+
81079	3 l	bangkirai	approx. 50 – 60 ml / m <sup>2</sup> *	Ö60+
81081	3 l	teak	approx. 50 – 60 ml / m <sup>2</sup> *	Ö60+
83471	3 l	douglas	approx. 50 – 60 ml / m <sup>2</sup> *	Ö60+
159652	10 l	nature	approx. 50 – 60 ml / m <sup>2</sup> *	Ö60+

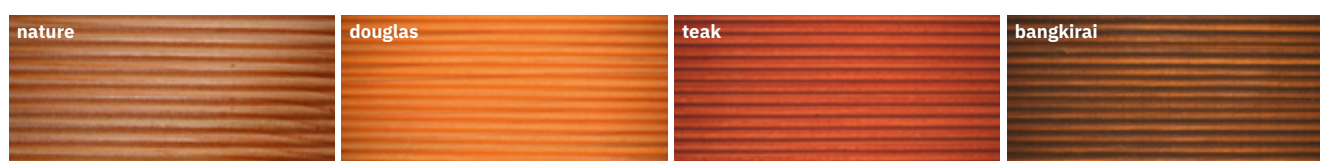

\* Exact consumption may vary strongly with the porosity and the surface structure of the treated wood type.

**Important note:** Sanding dust from oxygen-drying systems are self-igniting. Risk of fire! After completion of the sanding work, the accumulated sanding dust must be watered and disposed of in tightly closed containers! Contact with the product with pads or textile materials creates the risk of spontaneous combustion. Therefore soaked rags, pads or similar moisten with water and store/dispose in tightly closed containers.

# WOOD REFRESHER

## CLEANER

Water-based cleaner for refreshing grayed out wood surfaces.

### Suitable for

- refreshing and cleaning the exterior wood surfaces. Restores the natural color of the wood.

### Benefits

- high cleaning power
- gentle on the wood



Item no.	Package size	Color	Consumption
81783	2 l	neutral	approx. 50 – 100 ml / m <sup>2</sup> (depending on the degree of graying)



# END GRAIN PROTECTOR

## OIL-WAX

Solvent-based oil/wax combination for exterior wood impregnation.

### Suitable for

- decking
- purlins and rafters
- wooden facades

### Benefits

- brushable
- high elasticity



Item no.	Package size	Color	Consumption	GISCODE
82690	1 l	neutral	1 l is enough for approx. 5 m <sup>2</sup> of end grain wood	Ö60




**Important note:** Sanding dusts from oxygen-drying systems are self-igniting. Risk of fire! After completion of the sanding work, the accumulated sanding dust must be watered and disposed of in tightly closed containers! Contact with the product with pads or textile materials creates the risk of spontaneous combustion. Therefore soaked rags, pads or similar moisten with water and store/dispose in tightly closed containers.






# EASY GOING

**MACHINES & ACCESSORIES**

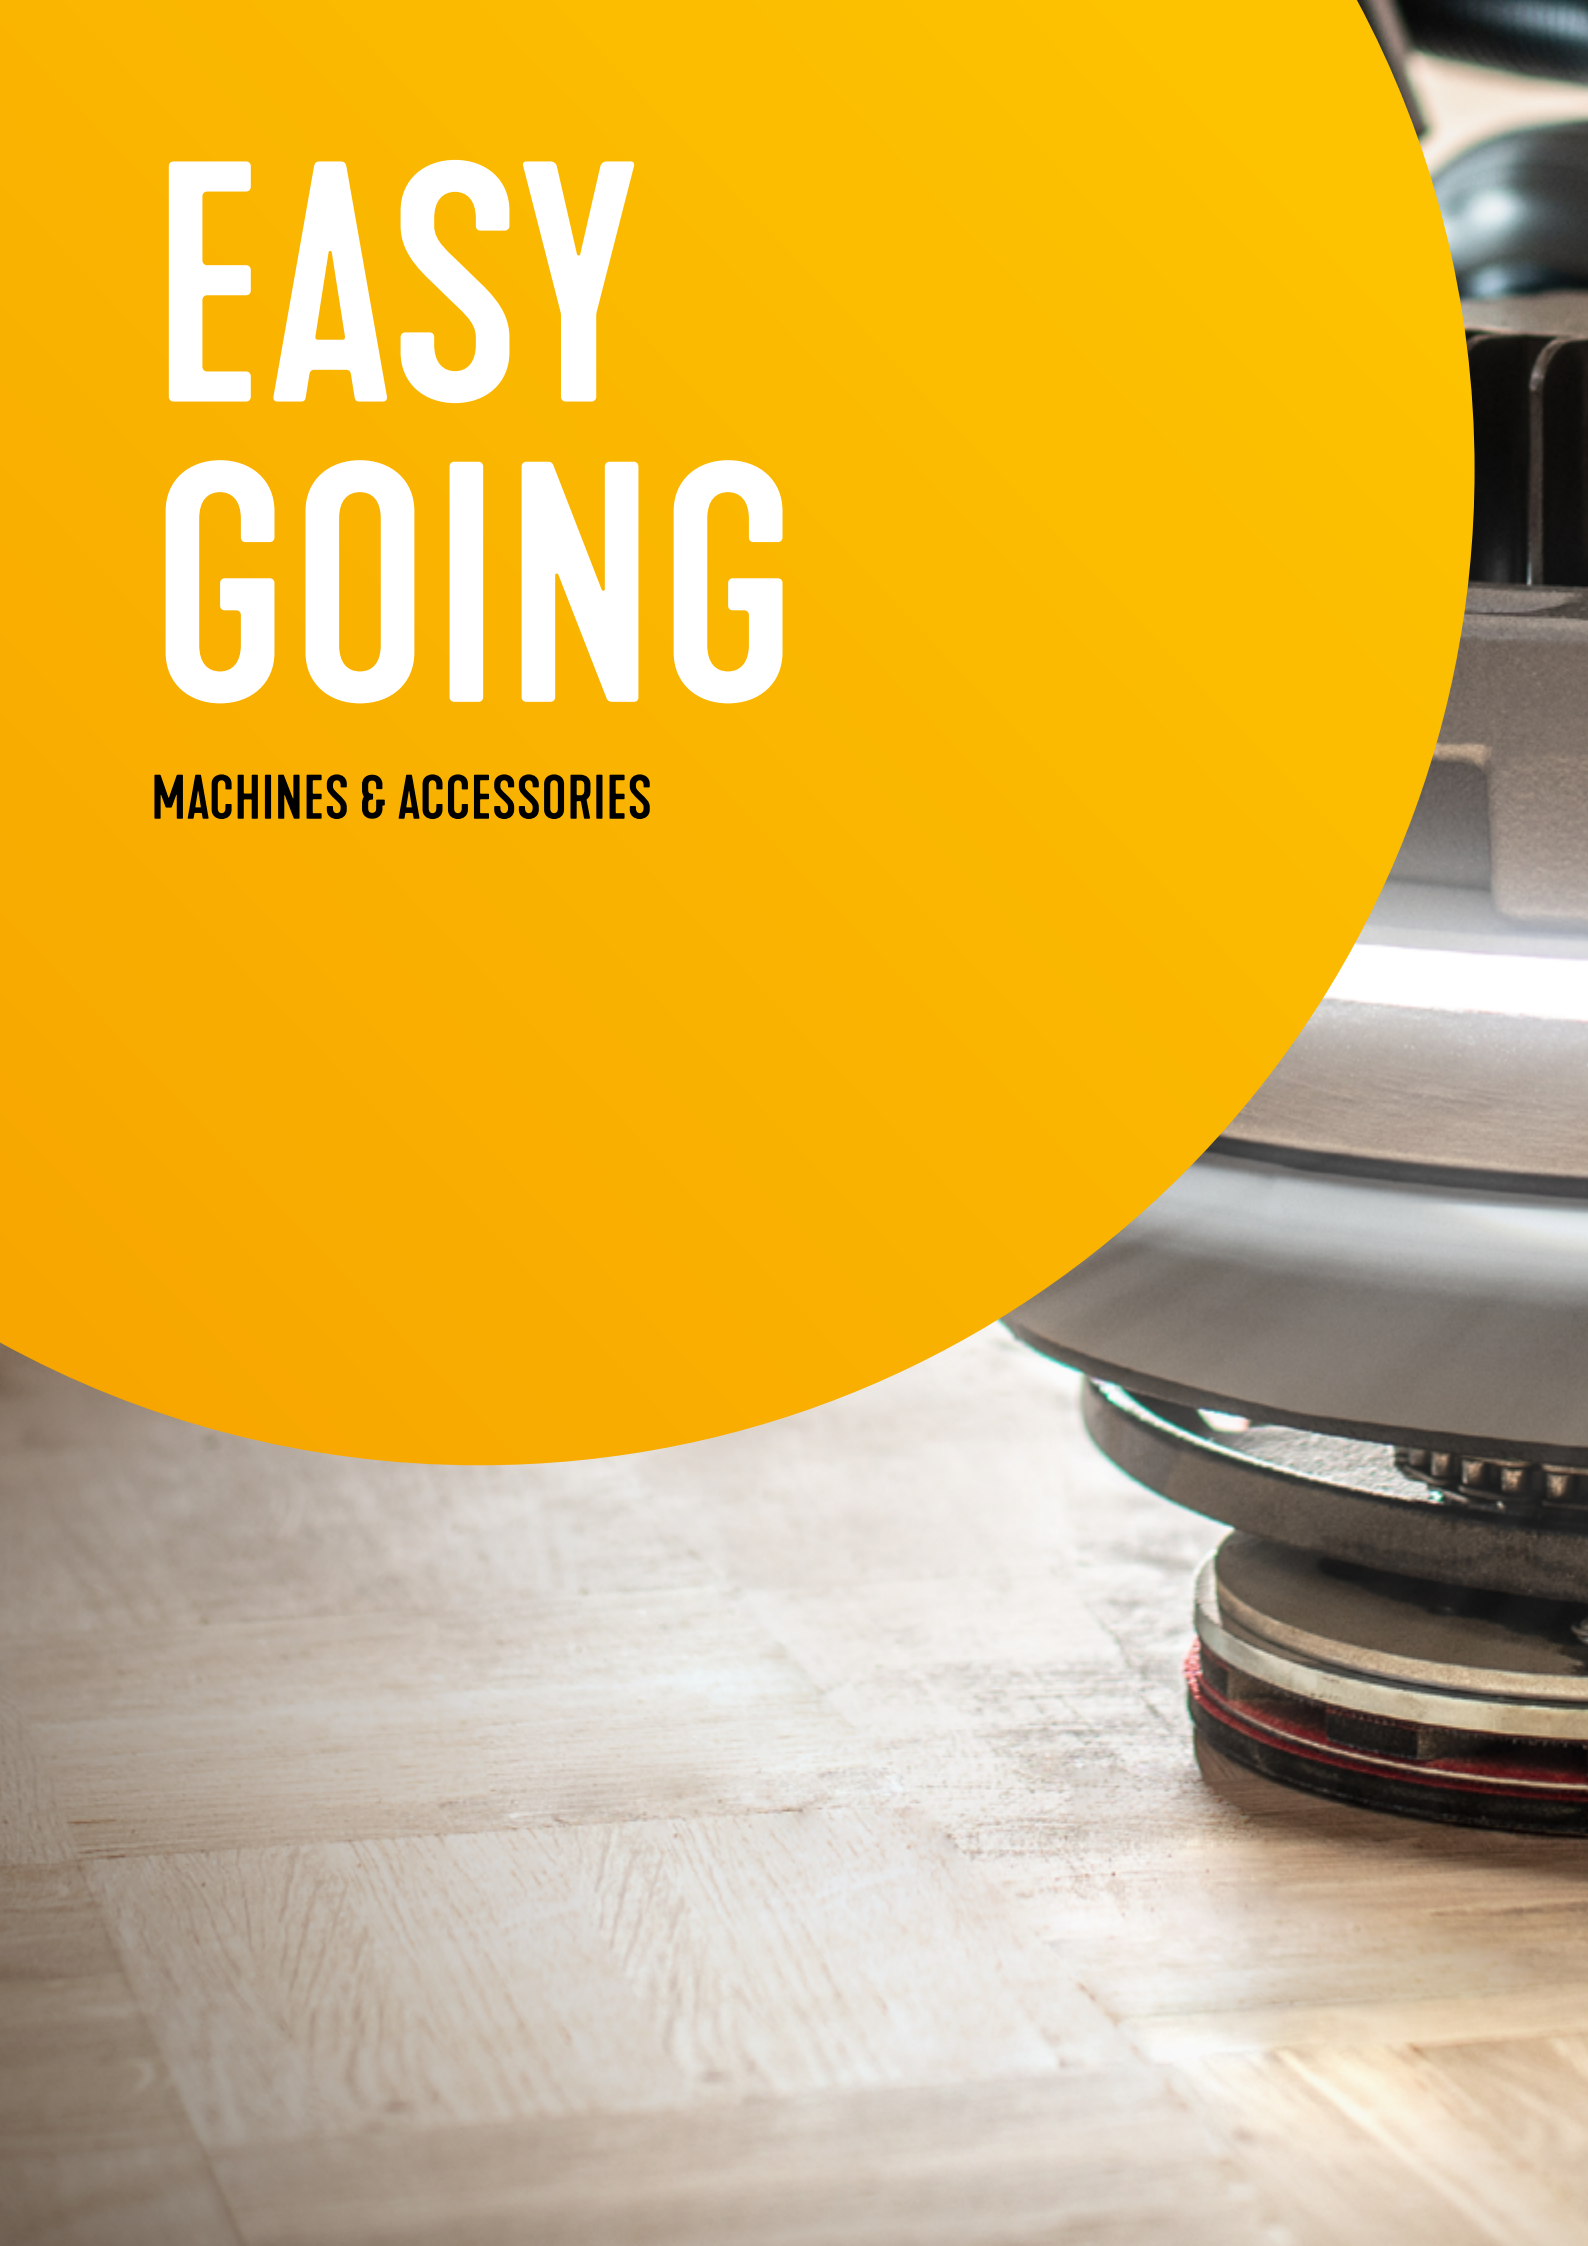



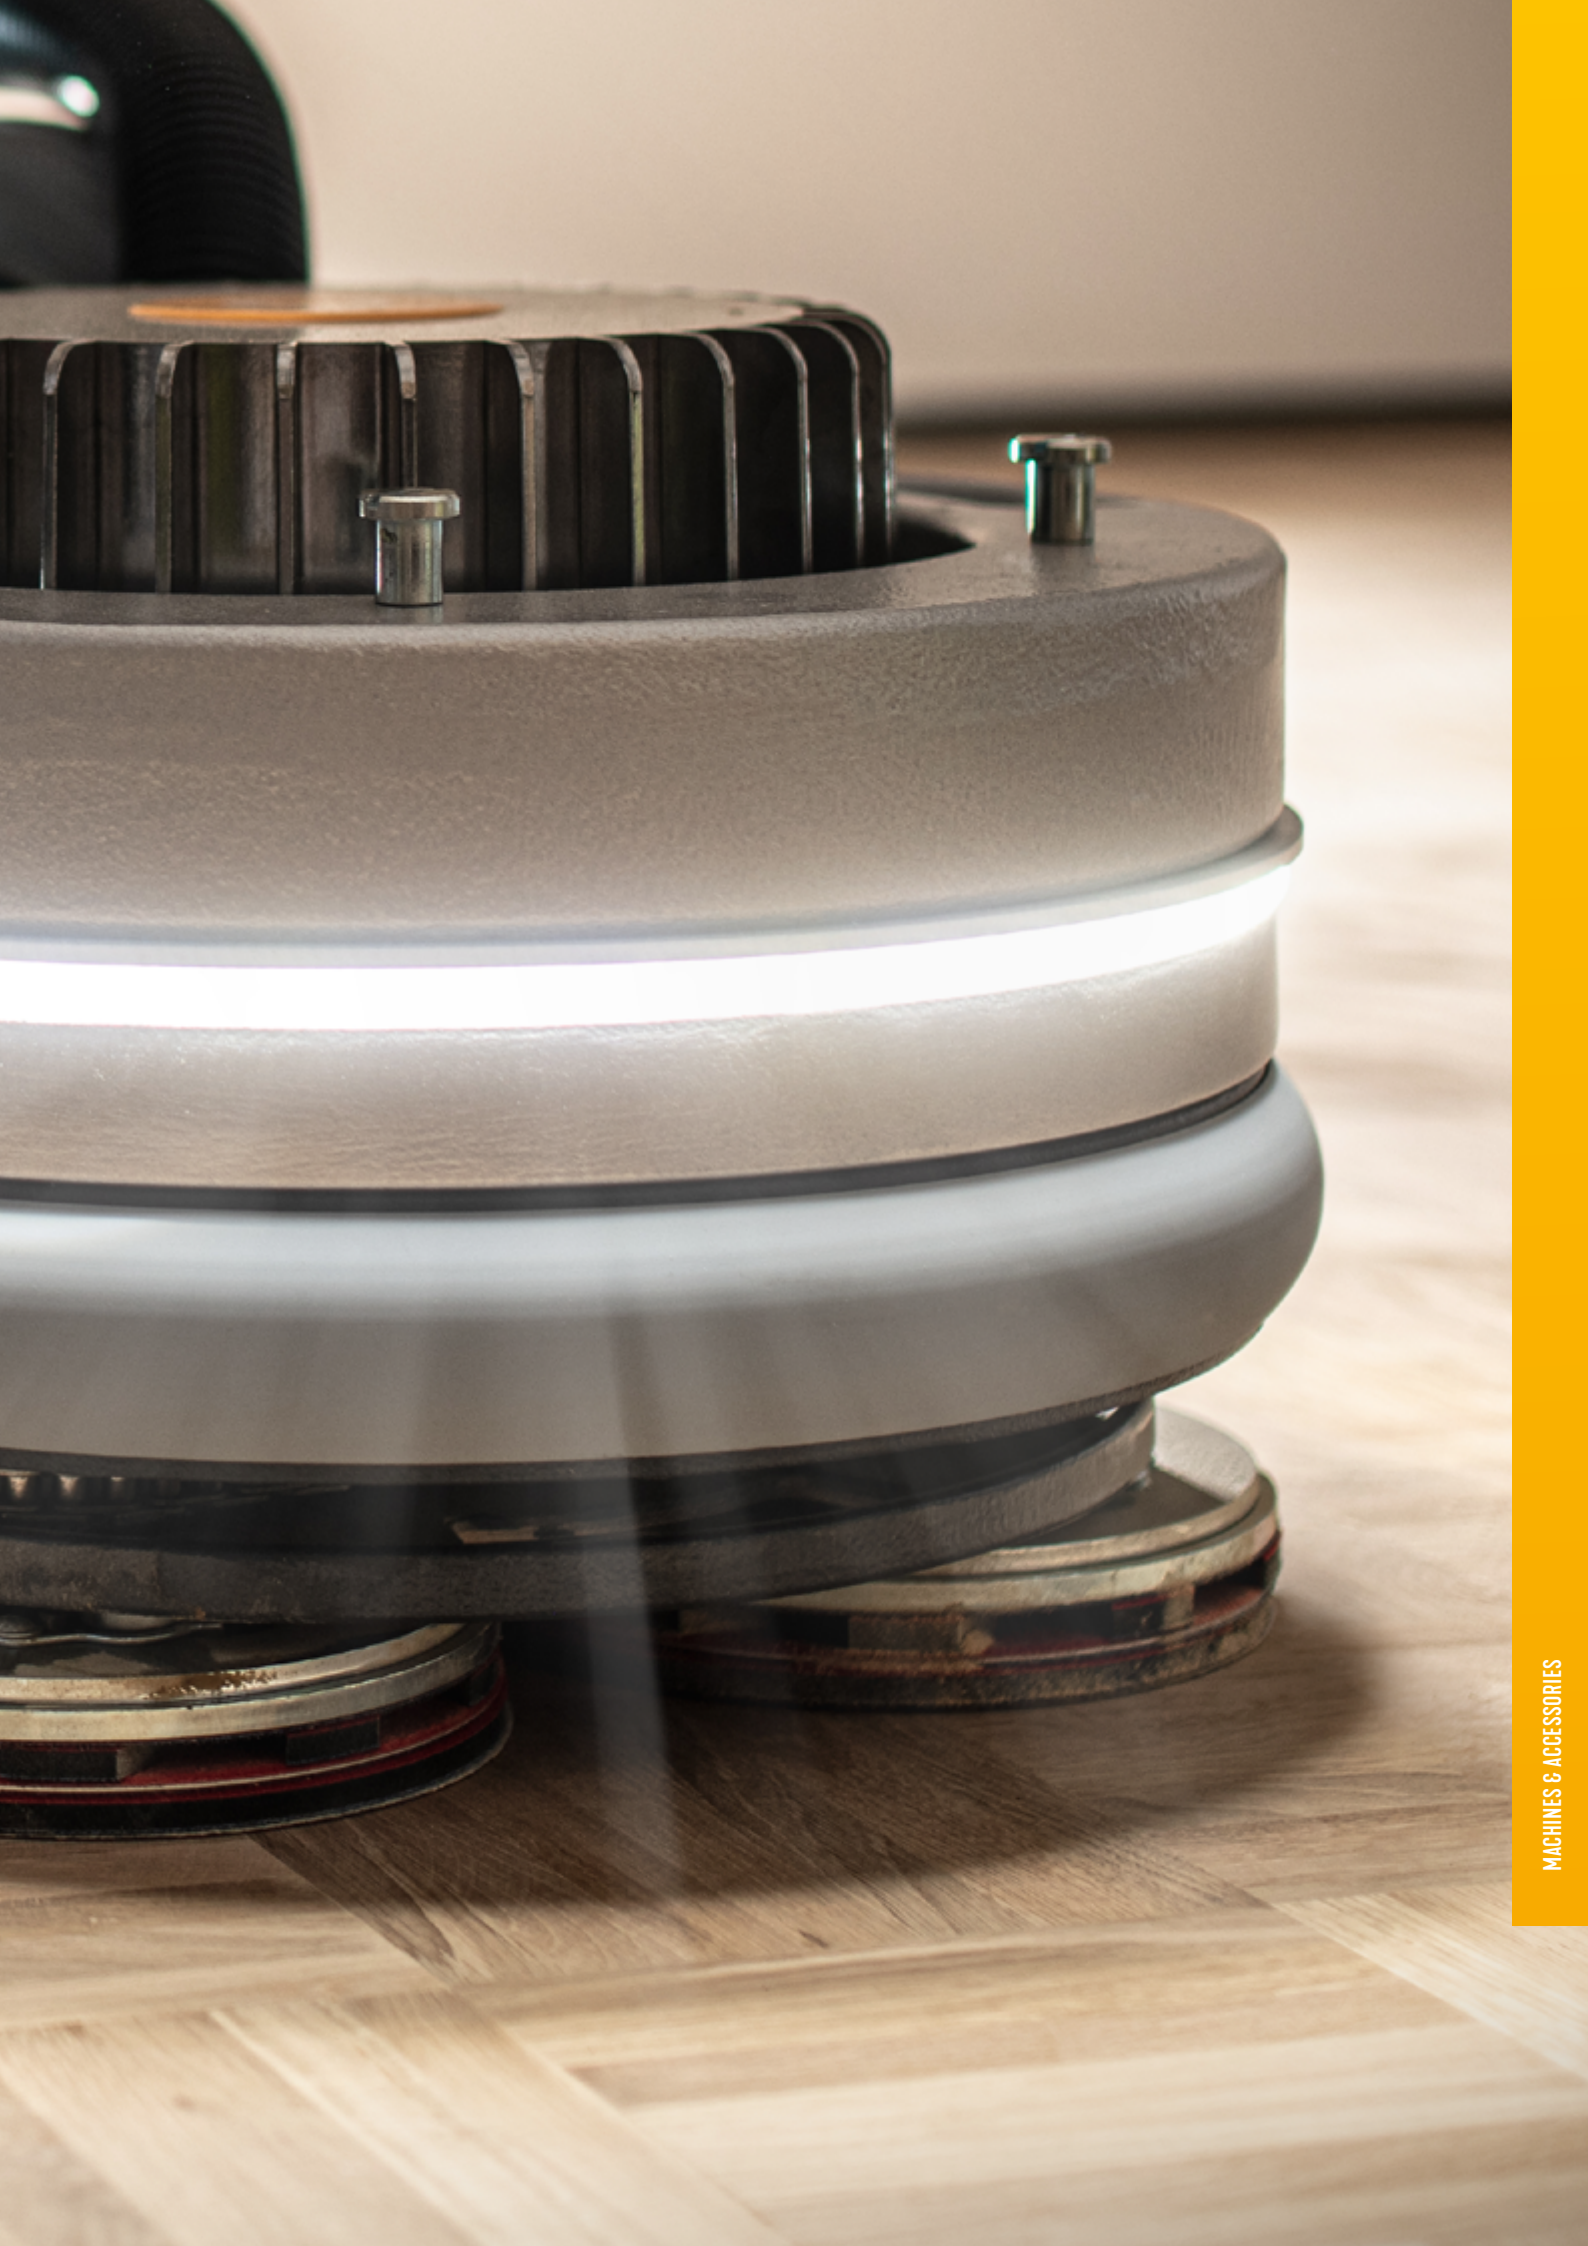

# PALLMANN SPIDER

## WOOD FLOOR SANDING MACHINE

Planetary gearing and powerful drive ensure a perfectly sanded surface. The multi-purpose **PALLMANN SPIDER** is extremely easy to use and quiet in operation. Highest quality materials and a newly developed drive mechanism, with connection to external vacuum means perfect sanding results.



### Benefits

- 360° illumination
- random option by use of power reserve
- extra additional weight increases the sanding pressure
- perfect sanding because of the triple-disc technology
- durable chain drive
- easy to clean
- infinite speed adjustment (50 – 400 RPM)
- high wood removal rate
- smooth start
- variable handle adjustment
- adapter for vacuum cleaner
- solid construction
- dust seal ring
- large, soft, non marking tyres
- high quality ball bearing axles

### Technical Data

- power supply: 230 V
- power consumption: 2000 W
- rotation speed: 50 – 400 U RPM
- total weight: 42 kg
- sanding width: 400 mm

### Accessories



Triple-disc-plate +  
Velcro 180 mm  
page 68




Additional weight  
à 15 kg  
page 68




Triple-disc-plate  
additional items  
page 68



Dust sealing sleeve  
page 68



Diamond Segments  
page 69



Abrasives  
page 76



LED-light ring  
page 68



Brush set  
page 72



### Item no.

### Included items

78319

PALLMANN SPIDER, additional weight à 15 kg, LED-light ring SPIDER, Dust seal ring, Cable 12.5 m, Triple-disc-plate + Velcro 180 mm, 3x Support pad 180 mm, 3x Support pad soft 180 mm, 3x Exhaust pad 180 mm, 3x Intermediate disc, Pad disc 40 cm, 3x Ceramic Plus velcro discs 178 mm with 10 holes Grit 50, 3x Zircon velcro discs 178 mm Grit 60, 3x Silicon Carbid 178 mm Grit 80 and occupational safety



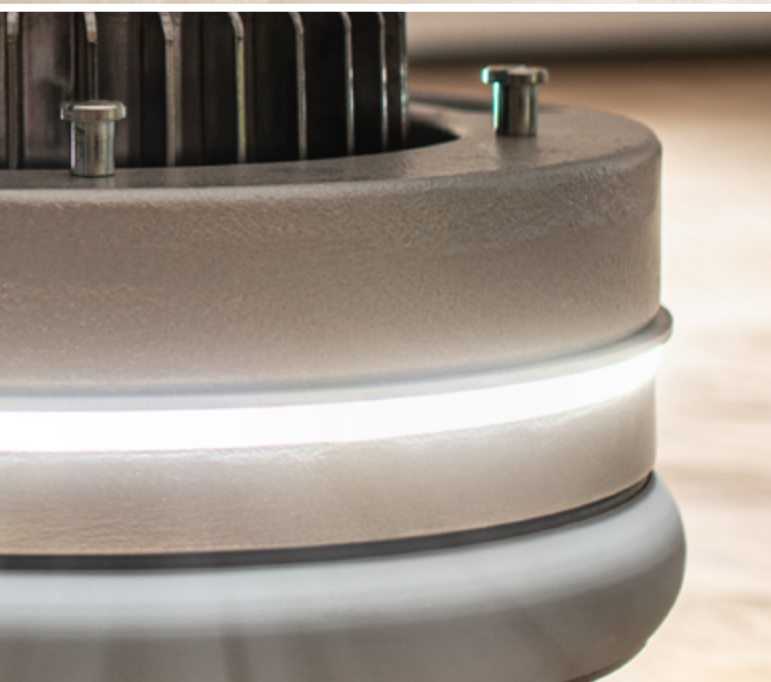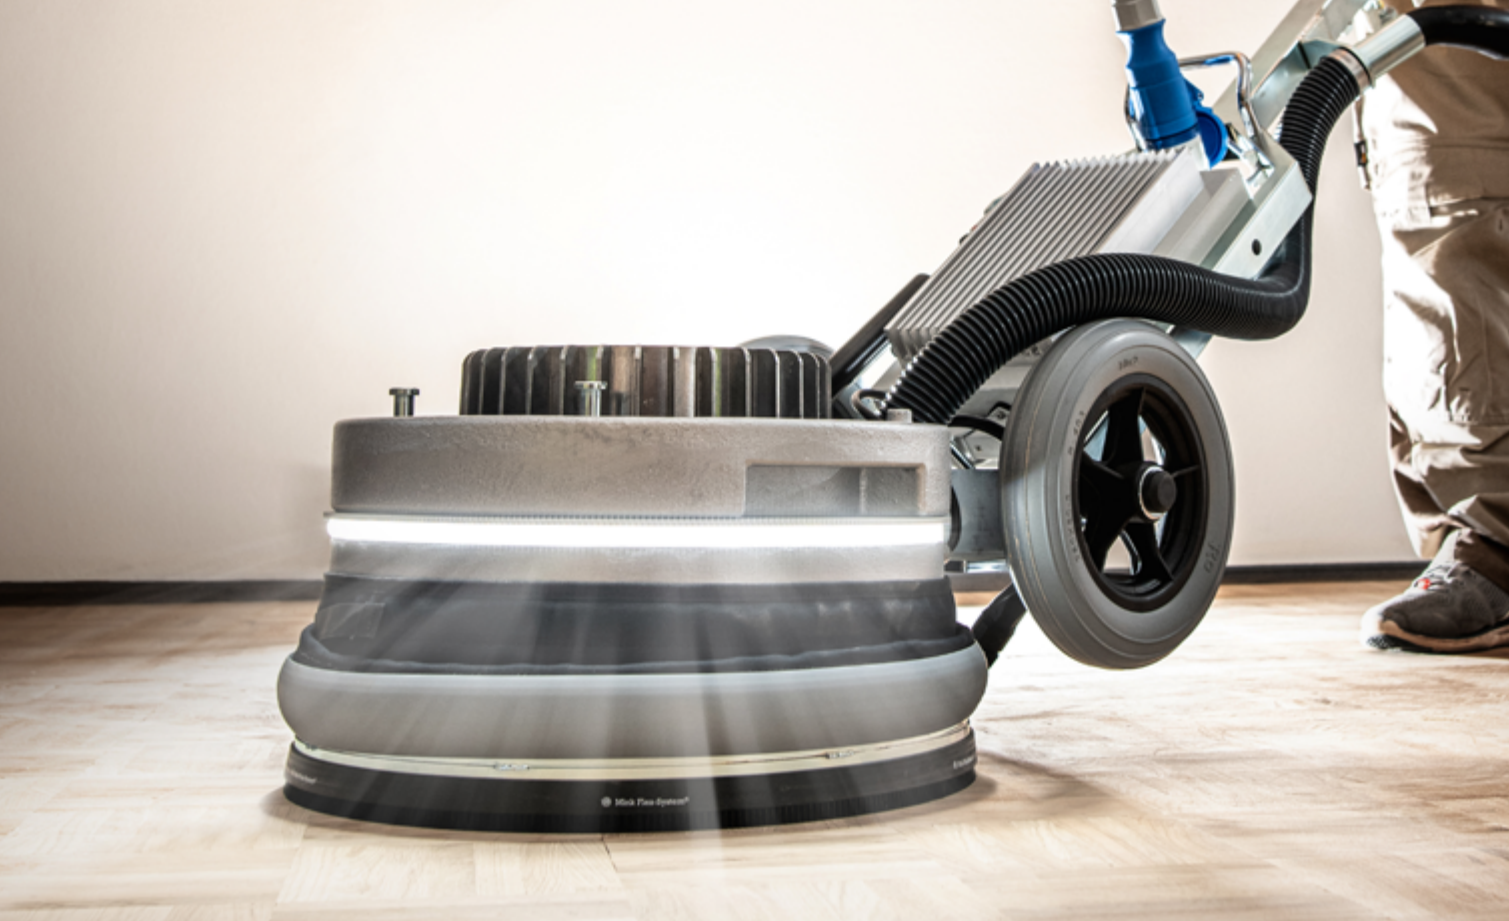

”

**The new 360° surround light optimally illuminates your working area. No matter in which direction you are sanding.**

Klaus-Jürgen Thiele,  
PALLMANN Key Account Manager Machines



# PALLMANN GECKO STAR 2.0

## EDGE SANDING MACHINE

**High performance, first-class sanding results and unparalleled smoothness make the PALLMANN GECKO STAR 2.0 indispensable for comfortable sanding in the edge area. The exceptional extraction technology with options between dust bag system and adapter for a vacuum cleaner ensure a clean working.**



### Benefits

- solid construction
- balanced weight for maximum sanding pressure
- high power (1,500 watts)
- solid, ergonomic handles for fatigue-free working
- optionally sturdy suction tube with dust bag and intelligent cable routing or with matching adapter for a dust extractor for high efficiency in the extraction of dusts
- cable clamps for suction hose
- unique, easy wheel position adjustment
- smooth running due to balanced weight
- extra wide, smooth-running wheels
- optimal illumination of the working area with LED technology
- flexible wheel adjustment


### Technical Data

- available capacity: 230 V, 50 Hz
- RPM: Ø 178: 3,300 RPM
- RPM: Ø 150: 3,800 RPM
- sanding attachment length: Ø 150: long/ short 370/ 130 mm
- sanding attachment length Ø 178: long/ short 385/ 175 mm
- adapter for an external suction unit 38 / 35 mm
- weight approx: ca. 9,6 kg
- wheel height adjustment: 12 mm


### Accessories



Attachment in different versions  
page 70



Silicon Carbide and Zircon  
velcro disc 178 mm  
page 78



Silicon Carbide and Zircon  
velcro disc 150 mm  
page 77

Item no.	Versions	Included items
82728	GECKO STAR 2.0 D 150 mm, attachment length long	Edge sanding machine PALLMANN GECKO STAR 2.0, adapter for vacuum cleaner, suction pipe long, suction pipe short, dust bag, ear protection, dust mask, additional handle, toolbag, 2x velcro washer, spare velcro pad, 2x Zircon velcro discs grit 40 and grit 80, 2x velcro belt, dust bag hanger
82730	GECKO STAR 2.0 D 178 mm, attachment length long	





”

**The PALLMANN GECKO STAR 2.0 is handy, flexible and extremely smooth running. The extraction technology enables virtually dust-free work.**

Josh Neuberger,  
Director of Marketing Uzin Utz Noth America



# PALLMANN COBRA

## WOOD FLOOR SANDING MACHINE

The PALLMANN COBRA sets standards in terms of efficiency, ergonomics and quality.

### Benefits

- high surface performance through maximum use of sanding belt width
- 5x height adjustable handle, optimized view in front of the machine
- cockpit controls: all switches can be reached while retaining an ergonomic working position for a higher user comfort
- one-way inlet in dust bag

### Technical data

- available capacity: 230 V, 2500 W
- roller width: 200 mm
- RPM: 2,100 RPM
- sanding belt dimensions: 200 x 750 mm
- weight: 89,7 kg
- accessories: connection for external vacuum cleaners



Art.-Nr.	Included items
59906	PALLMANN COBRA , toolbag, 2x dust bags and 10x plastic inlays, 2x sanding belts each of grit 36/60/100, PUR cable 12 m, ear protection, dust mask, special spare V belts

# PALLMANN GECKO FLEX

## EDGE SANDING MACHINE

**There is no angle or corner that the PALLMANN GECKO FLEX does not reach with it's full power and sanding performance. Once you have picked this machine up, you do not want to give it back! There are many features and benefits from flexible extraction to speed regulation, that convince the professional.**

### Benefits

- small, handy
- optimum position of the handle
- enabling almost dust-free sanding operation
- transport case available as an accessory
- full-surface disk plate
- adjustable brush rim
- clamping plate for slotted discs
- high removal rate

### Technical data

- sanding velcro disc: D180
- RPM: 1,400 – 4,200 RPM / continuous
- 1.5 kW original Flex Engine
- weight: 4,5 kg



Item no.	Included items
60037	PALLMANN GECKO FLEX, clamping plate, spare brush, handle, dust mask, ear protection, tools, adapter for vacuum cleaner, 3x zircon velcro discs grit 40 and grit 80, 3x hose holder, tools, connection for vacuum cleaner

# PALLMANN UNO

## SINGLE DISC ROTARY MACHINE

**Handy, very powerful single-disc rotary machine for intermediate sanding and polishing wood floors as well as for sanding and brushing screeds and fillers.**

### Benefits

- high-performance machine
- favorable working weight
- extensive accessories

### Technical data

- capacity: 230 V, 1600 W
- RPM: 160 RPM
- weight: 44 kg
- power disk: 375 / 400 mm



Item no.	Included items
59629	PALLMANN UNO, power disk for pads, without vacuum cleaner



# PALLMANN TURBO SCRUBBER

## CLEANING MACHINE

Powerful suction scrubber for the intensive surface cleaning of sealed, oiled and structured wooden floors and decking.

### Benefits

- 2 fast rotating roller brushes with high contact pressure
- 2 squeegee strips take the water forward and backward
- the floor is immediately accessible again
- the push bar can be folded in both directions
- simple, tool-free change of brushes an squeegee lips
- with integrated control of water supply and brush
- can bei used for both terraces and indoors

### Technical data


- working width: 400 mm
- recording power: 2,300 W
- tank fresh- / dirty water: 10 l each
- brush pressure: 100 / 200 g / cm<sup>2</sup>
- brush speed: 1,100 RPM
- max. area coverage: 400 m<sup>2</sup> / h
- voltage: 220 / 240 volts
- weight: 30 kg
- product dimensions: 520 x 470 x 380 mm ( L x B x H)



### Accessories



Turbo Scrubber  
Brush Roller  
page 70



Turbo Scrubber Suction Lip  
page 70

Item no.	Included items
83588	PALLMANN TURBO SCRUBBER, 2x roller brushes white, cable 20 m

## SPIDER ADDITIONAL WEIGHT À 15 KG

### ACCESSORIES



Item no.	Package
72225	1 piece

## SPIDER DUST SEAL RING

### ACCESSORIES



Item no.	Package
72157	1 piece

## SPIDER DUST SEALING SLEEVE

### ACCESSORIES



Item no.	Included items
86015	SPIDER DUST SEALING SLEEVE, velcro tape

## SPIDER LED-LIGHT RING

### ACCESSORIES



Item no.	Package
162715	1 piece

## SPIDER TRIPLE-DISC-PLATE + VELCRO 180 MM

### ACCESSORIES



Item no.	Package
81696	1 piece

## SPIDER TRIPLE-DISC-PLATE ACCESSORIES

### ACCESSORIES



Item no.	Package
75685	Exhaust pad 180 mm
75683	Support pad 180 mm
75684	Support pad soft 180 mm

## SPIDER REPLACEMENT VELCRO DISC BLUE SELF-ADHESIVE 178 MM


### ACCESSORIES



Item no.	Package
75687	1 Stück

## SPIDER INTERMEDIATE DISC 180 MM

### ACCESSORIES



Item no.	Package
75687	1 piece

## SPIDER CLUTCH CLARKE

### ACCESSORIES



Item no.	Package
72788	1 piece

## SPIDER PAD DISC WITH CLARKE COUPLING

### ACCESSORIES



Item no.	Package
079671	1 piece

## SPIDER GAS PRESSURE SPRING

### ACCESSORIES



Item no.	Package
72136	1 piece

## SPIDER DIAMOND SEGMENT

### ACCESSORIES



Item no.	Included items
88477	DIAMOND SEGMENT STARTERKIT K 30 9x DIAMOND SEGMENT K 30, 3x SATELLITE DISC 178 MM
88478	DIAMOND SEGMENT STARTERKIT K 50 9x DIAMOND SEGMENT K 50, 3x SATELLITE DISC 178 MM
88321	DIAMOND SEGMENT K 30 9x DIAMOND SEGMENT K 30
88322	DIAMOND SEGMENT K 50 9x DIAMOND SEGMENT K 50
84572	SATELLITE DISC DIAMOND SEGMENT 178 MM 1 disc



## SPIDER DIAMOND SEGMENT BOX ACCESSORIES



Item no.		Package
89462	SPIDER DIAMOND SEGMENT BOX	1 piece

## GECKO FLEX TRANSPORT CASE ACCESSORIES



Item no.		Package
64135		1 piece

## GECKO STAR 2.0 EXTENSION SHORT ACCESSORIES



Item no.		Package
65829	Extension short GECKO STAR D 150 mm	1 piece
65827	Extension short GECKO STAR D 178 mm	1 piece

## TURBO SCRUBBER BRUSH ROLLER ACCESSORIES



Item no.		Color
84069	TURBO SCRUBBER BRUSH ROLLER 400 mm	orange
84070	TURBO SCRUBBER BRUSH ROLLER 400 mm	white
84071	TURBO SCRUBBER BRUSH ROLLER 400 mm	red
84072	TURBO SCRUBBER BRUSH ROLLER 400 mm	green

## TURBO SCRUBBER SUCTION LIP ACCESSORIES



Item no.		Package
88662		2 piece

## WOLFF® PRE-SEPARATOR

### ACCESSORIES FOR VACUUM CLEANER

Powerful pre-separator, which separates large quantities of coarse dust and fine dust even before vacuuming. It can be used for large sanding machines, and single disc sanding machines, saws, hand grinders and many other electrical appliances and can also be used for vacuuming surfaces.

#### Benefits

- constant suction power
- protection of vacuum cleaner and filter
- separation efficiency up to 99 % of the particles
- non-marking wheels
- easy emptying with commercial garbage bags

#### Technical data

- weight: 10 kg
- dimensions: Ø 50 x 106 cm
- hose length: 1,5 m
- volume: 50 l



Item no.	Included items
82215	Wolff pre-separator, cyclone completely assembled, dust kettle, hose 1,5 m

# PALLMANN BRUSH SET

## BRUSH TECHNOLOGY

With the PALLMANN brush technology for the PALLMANN SPIDER the unique structure and the special character of a real wood floor can be created. The softer annual rings are brushed out of the wood, while the harder wood is preserved.



### Suitable for

- solid and multilayer wood floor (engineered boards)
- oiled or untreated wood floors

### Benefits

- long service life of the brushes
- high efficiency
- numerous design options
- perfect processing of textured surfaces with the nylon brushes

Item no.	Included items
83338	3x PALLMANN stainless steel brushes, 3x PALLMANN nylon brushes grit 46, 3x PALLMANN nylon brushes grit 60, work gloves, PALLMANN SPIDER brush ring 25 mm

#### Requirements of the wood floor:

Wear layer thickness: At least 3.5 mm (unstructured wood floor), at least 4 mm (already structured wood floor). Suitable types of wood for example: oak, ash, douglas fir, larch, spruce, pine or ringporer or softwoods.  
Suitable wood flooring types: mosaic parquet, lamparquet, strip parquet, multi-layer parquet (dimension approx. 70 mm x 500 mm).  
Laying pattern: cube, bandage, parallel, herringbone.

Item no.	Product name	Package
83568	PALLMANN stainless steel brushes	3 pieces
83566	PALLMANN nylon brushes grit K 46	3 pieces
83567	PALLMANN nylon brushes grit K 60	3 pieces
83343	work gloves	1 pair
83015	PALLMANN SPIDER brush ring 25 mm	1 piece





”

**To create distinctive character in the wood floor, the PALLMANN BRUSH SET has everything you need to create impressive character in the structure treatment of wood floors.**

Michael Garbe,  
PALLMANN International Technician



# ALSO HELPFUL

**CONSUMABLE MATERIAL,  
TOOLS AND ACCESSORIES**









## ZIRCON VELCRO DISC 178 MM 10-HOLES FOR GECKO FLEX, SPIDER ABRASIVE



Item no.	GRIT	Package
81062	Grit 24	25 pieces per box
81061	Grit 36	25 pieces per box
62002	Grit 40	50 pieces per box
62003	Grit 60	50 pieces per box
62005	Grit 80	50 pieces per box
62006	Grit 100	50 pieces per box

## CERAMIC PLUS VELCRO DISC 178 MM 10-HOLES FOR GECKO FLEX, SPIDER ABRASIVE



Item no.	GRIT	Package
83655	Grit 36	25 pieces per box
83903	Grit 50	25 pieces per box
10072	Grit 60	25 pieces per box

## SILICON CARBID VELCRO DISC 178 MM 10-HOLES FOR GECKO FLEX, SPIDER ABRASIVE



Item no.	GRIT	Package
83905	Grit 80	50 pieces per box
83906	Grit 100	50 pieces per box

## PALLMANN POWER PAD 178 MM FOR SPIDER ABRASIVE



Item no.	GRIT	Package
88472	Grit 80	25 pieces per box
88473	Grit 100	25 pieces per box


## PALLMANN POWER PAD 410 MM FOR SPIDER, UNO ABRASIVE



Item no.	GRIT	Package
88424	Grit 80	10 pieces per box
88425	Grit 100	10 pieces per box
88426	Grit 120	10 pieces per box

## ABRASIVE GRID 406 MM FOR SPIDER, UNO


### ABRASIVE



Item no.	GRIT	Package
12665	Grit 60	10 pieces per box
12666	Grit 80	10 pieces per box
12667	Grit 100	10 pieces per box
12668	Grit 120	10 pieces per box

## GLOSSY PAD 410 MM FOR SPIDER, UNO


### ABRASIVE



Item no.	KIND/GRIT	Package
42727	SG 320	15 pieces per box

## SILICON CARBID VELCRO DISC 150 MM WITH HOLE FOR GECKO PURE, GECKO STAR, GECKO STAR 2.0

### ABRASIVE



Item no.	GRIT	Package
41054	Grit 16	25 pieces per box
41055	Grit 24	25 pieces per box
41056	Grit 36	25 pieces per box
41057	Grit 40	50 pieces per box
41059	Grit 60	50 pieces per box
41060	Grit 80	50 pieces per box
41111	Grit 100	50 pieces per box

## ZIRCON VELCRO DISC 150 MM FOR GECKO PURE, GECKO STAR, GECKO STAR 2.0

### ABRASIVE



Item no.	GRIT	Package
63016	Grit 40	50 pieces per box
42171	Grit 60	50 pieces per box
41124	Grit 80	50 pieces per box
63017	Grit 100	50 pieces per box

## ZIRCON VELCRO DISC 150 MM 8-HOLES ABRASIVE



Item no.	GRIT	Package
64657	Grit 40	50 pieces per box
64658	Grit 60	50 pieces per box
64660	Grit 80	50 pieces per box
64681	Grit 100	50 pieces per box

## SILICON CARBID VELCRO DISC 178 MM WITH HOLE FOR GECKO PURE, GECKO STAR, GECKO STAR 2.0 ABRASIVE



Item no.	GRIT	Package
41113	Grit 16	25 pieces per box
41114	Grit 24	25 pieces per box
41115	Grit 36	25 pieces per box
41117	Grit 40	50 pieces per box
41119	Grit 60	50 pieces per box
41120	Grit 80	50 pieces per box
41121	Grit 100	50 pieces per box

## ZIRCON VELCRO DISC 178 MM FOR GECKO PURE, GECKO STAR, GECKO STAR 2.0 ABRASIVE



Item no.	GRIT	Package
64374	Grit 40	50 pieces per box
64375	Grit 60	50 pieces per box
64376	Grit 80	50 pieces per box

## CORUNDUM SANDING BELT 200 X 750 MM FOR COBRA, COBRA CLASSIC, VIPER ABRASIVE



Item no.	GRIT	Package
12621	Grit 16	10 pieces per box
12622	Grit 24	10 pieces per box
12624	Grit 36	10 pieces per box
12625	Grit 40	10 pieces per box
12627	Grit 60	10 pieces per box
12628	Grit 80	10 pieces per box
12629	Grit 100	10 pieces per box
12630	Grit 120	10 pieces per box



## ZIRCON SANDING BELT 200 X 750 MM FOR COBRA, COBRA CLASSIC, VIPER ABRASIVE



Item no.	GRIT	Package
11478	Grit 24	10 pieces per box
11479	Grit 36	10 pieces per box
11480	Grit 40	10 pieces per box
11481	Grit 60	10 pieces per box
11482	Grit 80	10 pieces per box
11483	Grit 100	10 pieces per box

## CLEANING PAD 406 / 10 MM FOR SPIDER, UNO PAD



Item no.	Color	Package
12676	beige	10 pieces per box
12677	green	10 pieces per box
12679	white	10 pieces per box

## CLEANING PAD 406 / 20 MM FOR SPIDER, UNO PAD



Item no.	Color	Package
12680	beige	5 pieces per box
12691	green	5 pieces per box
12693	white	5 pieces per box

## JOINT FILLER SEALANT

Acrylic dispersion sealant to seal joints and final joints.

### Benefits

- silicone-free
- can be lacquered over

### Suitable for filling and sealing

- expansion joint
- between wood flooring and walls




Item no.	Package size	Color
11665	310 ml	Beech non-smoked, Canadian maple 179
11666	310 ml	Oak light 141
11667	310 ml	Smoked beech, Cherry 104
11668	310 ml	Dark exotic wood types, Afromosia, Wenge980
11669	310 ml	Ash, Spruce, Europ. Maple 178
41126	310 ml	Dark oak 303

## FLOOR MOP / SPARE COVER FOR MOP TOOL



Item no.	Package
12510	10 pieces
12598 (Spare cover for Mop)	10 pieces

## MAGIC OIL APPLICATOR TOOL



Item no.	Package
55889	1 piece
55890 (replacement lip for MAGIC OIL APPLICATOR)	1 piece

## CLOTH FOR OIL WAX FINISHING TOOL



Item no.	Package
40289	10 pieces

## TROWEL STAINLESS 27 CM TOOL



Item no.	Package
12506	6 pieces

## PALLMANN ADHESIVE TROWEL TOOL



Item no.	Notching	Package
59960	PALLMANN Adhesive trowel B11, 18 cm	10 pieces per box
61482	PALLMANN Adhesive trowel B3, 18 cm	10 pieces per box
67259	PALLMANN solid board notch trowel	10 pieces per box



## APPLICATION ROLLER WATERBASED UNIVERSAL 11MM/25CM TOOL



Item no.	Package
12495	12 pieces

## APPLICATION ROLLER WATERBASED SPECIAL 8MM/25CM TOOL



For the application of PALL-X PURE, PALL-X ZERO 2K and ECO OIL 1K.

Item no.	Package
83923	10 pieces

## APPLICATION ROLLER WATERBASED GLOSS 14MM/25CM TOOL



Item no.	Package
67669	1 piece

## APPLICATION ROLLER SOLVENTBASED 4MM/25CM TOOL



Item no.	Package
12496	50 pieces

## NYLON-FIBRE-ROLLER TOOL



Item no.	Package
9394	10 pieces

## HANDLE FOR APPLICATION ROLLER TOOL



Item no.	Package
12494	50 pieces



## TELESCOPIC HANDLE LP220 TOOL



Item no.	Package
12503	10 pieces

## APPLICATION ROLLER SPORT COLOR 4MM/5CM TOOL



Item no.	Package
21192	20 pieces

## HANDLE FOR APPLICATION ROLLER COLOR TOOL



Item no.	Package
21193	1 piece

## ROLLER CONTAINER TOOL



Item no.	Package
13814	1 piece

## INSERT BAG TOOL



Item no.	Package
40181	50 pieces

## PALLMANN LACQUER BUCKET TOOL



Item no.	Package size	Color	Package
17393	19 l	black	1 piece

## ADHESIVE TAPE FOR SPORT-COLOR 2K 25 MM X 50 M TOOL



Item no.	Package
14184	1 piece

## WZL® CLEAN-BOX CLEANING CLOTHS

### Suitable for

- removes both fresh and dried 1-component PUR and STP adhesive residues
- removes fresh to slightly dried 2-component PUR and epoxy resin adhesive residues

### Benefits

- dries quickly with no residue
- multipurpose applications
- especially kind to skin
- economical in use



Item no.	Package size	Color	Package
38465	1 drum each 72 cloths	green	6 pieces

## WZ ABRASIVE PAD PAD

Pad for the basic cleaning of coverings that are subsequently coated with Turbo Protect.



Item no.	Diameter	Package
160063	406 mm	5 pieces

# INDEX

## COMPLETE PRODUCT RANGE A–Z

<b>A</b>	ABRASIVE GRID 406 MM .....	77	<b>N</b>	NYLON-FIBRE ROLLER.....	81
	ADHESIVE TAPE FOR SPORT-COLOR 2K 25 MM X 50 M.....	83	<b>O</b>	OUTDOOR-OIL .....	58
	ALLBASE .....	40	<b>P</b>	PALLMANN ADHESIVE TROWEL.....	80
	ALLKITT .....	40		PALLMANN BRUSH SET.....	72
	APPLICATION ROLLER SPORT COLOR 4MM/5CM .....	82		PALLMANN COBRA.....	66
	APPLICATION ROLLER SOLVENTBASED 4MM/25CM .....	81		PALLMANN COLOR COLLECTION STYLEBOX.....	26
	APPLICATION ROLLER WATERBASED GLOSS 14MM/25CM .....	81		PALLMANN FREESTYLE COLLECTION .....	27
	APPLICATION ROLLER WATERBASED SPECIAL 8MM/25CM .....	81		PALLMANN GECKO FLEX .....	66
	APPLICATION ROLLER WATERBASED UNIVERSAL 11MM/25CM .....	81		PALLMANN GECKO STAR 2.0.....	64
<b>C</b>	CERAMIC PLUS VELCRO DISC 178 MM 10-HOLES.....	76		PALLMANN LACQUER BUCKET .....	82
	CLEAN .....	54		PALLMANN P4.....	46
	CLEAN STRONG.....	55		PALLMANN P5.....	46
	CLEANING PAD 406 / 10 MM .....	79		PALLMANN P6.....	46
	CLEANING PAD 406 / 20 MM .....	79		PALLMANN P9.....	47
	CLOTH FOR OIL WAX FINISHING .....	80		PALLMANN P25 .....	49
	CORUNDUM SANDING BELT 200 X 750 MM .....	78		PALLMANN P104.....	47
<b>E</b>	ECO OIL 1K.....	37		PALLMANN POWER PAD 178 MM.....	76
	ECO OIL CARE .....	55		PALLMANN POWER PAD 410 MM.....	76
	END GRAIN PROTECTOR .....	58		PALLMANN SPIDER .....	62
<b>F</b>	FINISH CARE .....	54		PALLMANN TURBO SCRUBBER .....	67
	FINISH CARE STOP .....	54		PALLMANN UNO .....	66
	FLOOR MOP / SPARE COVER FOR MOP.....	80		PALLMANN X-LIGHT SYSTEM .....	38
<b>G</b>	GECKO FLEX TRANSPORT CASE.....	70		PALL-X 94.....	32
	GECKO STAR 2.0 EXTENSION SHORT .....	70		PALL-X 96.....	30
	GLOSSY PAD 410 MM .....	77		PALL-X 98.....	28
<b>H</b>	HANDLE FOR APPLICATION ROLLER .....	81		PALL-X 320.....	21
	HANDLE FOR APPLICATION ROLLER COLOR .....	82		PALL-X 325.....	21
	HARDWAXOIL .....	41		PALL-X 330.....	21
<b>I</b>	INSERT BAG .....	82		PALL-X 333.....	22
<b>J</b>	JOINT FILLER .....	79		PALL-X 333 C COLOR CONCENTRATE.....	24
<b>M</b>	MAGIC OIL 1K EASY .....	37		PALL-X 333 COLOR TESTER .....	26
	MAGIC OIL 2K ERGO .....	34		PALL-X 350.....	20
	MAGIC OIL 2K ORIGINAL .....	36		PALL-X FILLER .....	18
	MAGIC OIL 2K SPA.....	37		PALL-X GEL .....	20
	MAGIC OIL 2K WHITE.....	36		PALL-X GRIP .....	33
	MAGIC OIL APPLICATOR .....	80		PALL-X KITT.....	20
	MAGIC OIL CARE .....	52		PALL-X PURE.....	32
	MAINTENANCE OIL.....	55		PALL-X RETARDER.....	33



PALL-X SPORT 2K.....	32	UZIN PE 360 PLUS.....	49
PALL-X ZERO 1K.....	14	<b>W</b> WOLFF PRE-SEPARATOR.....	71
PALL-X ZERO 2K.....	17	WOOD REFRESHER.....	58
PALL-X ZERO BASE.....	16	<b>Z</b> ZIRCON SANDING BELT 200 X 750 MM.....	79
PALL-X ZERO FILLER.....	16	ZIRCON VELCRO DISC 150 MM 8-HOLE.....	78
<b>R</b> ROLLER CONTAINER.....	82	ZIRCON VELCRO DISC 150 MM.....	77
RZ ABRASIVE PAD.....	83	ZIRCON VELCRO DISC 178 MM 10-HOLE.....	76
RZ ELASTIC SEALER.....	43	ZIRCON VELCRO DISC 178 MM.....	78
RZ PUR CLEANER.....	42		
RZ TURBO BASIC CLEANER.....	43		
RZ TURBO PROTECT EXTRA.....	43		
RZ TURBO PROTECT PLUS.....	42		
<b>S</b> SH 81.....	41		
SILICON CARBID VELCRO DISC 150 MM WITH HOLE.....	77		
SILICON CARBID VELCRO DISC 178 MM 10-HOLE.....	76		
SILICON CARBID VELCRO DISC 178 MM WITH HOLE.....	78		
SPIDER ADDITIONAL WEIGHT À 15 KG.....	68		
SPIDER CLUTCH CLARKE.....	69		
SPIDER DUST SEAL RING.....	68		
SPIDER DUST SEALING SLEEVE.....	68		
SPIDER DIAMOND SEGMENT.....	69		
SPIDER DIAMOND SEGMENT BOX.....	70		
SPIDER GAS PRESSURE SPRING.....	69		
SPIDER INTERMEDIATE DISC 180 MM.....	69		
SPIDER LED-LIGHT RING.....	68		
SPIDER TRIPLE-DISC-PLATE + VELCRO 180 MM.....	68		
SPIDER TRIPLE-DISC-PLATE ACCESSORIES.....	68		
SPIDER REPLACEMENT VELCRO DISC BLUE SELF-ADHESIVE 178 MM.....	69		
SPIDER PAD DISC WITH CLARKE COUPLING.....	69		
SPORT-COLOR 2K.....	33		
<b>T</b> TELESCOPIC HANDLE LP220.....	82		
TROWEL STAINLESS 27 CM.....	80		
TURBO SCRUBBER BRUSH ROLLER.....	70		
TURBO SCRUBBER SUCTION LIP.....	70		
<b>U</b> UNI-KITT.....	40		
UZIN CLEAN-BOX.....	83		
UZIN NC 182.....	49		

# PALLMANN INTERNATIONAL CONTACT



## **Argentina**

### **Floortek SRL\***

Sivori 5180 Munro  
1605 Buenos Aires  
Argentina  
Tel. +54 1147621872  
E-mail [info@floortek.com.ar](mailto:info@floortek.com.ar)  
[www.floortek.com.ar](http://www.floortek.com.ar)



## **Australia**

### **Uzin Utz South Pacific Ltd.**

Representative Office Australia  
PO Box 454  
Helensvale  
QLD 4212  
Australia  
Tel. +61 4 912853 94  
E-mail [pallmann@ufloor-systems.net](mailto:pallmann@ufloor-systems.net)  
[www.uzin.com.au](http://www.uzin.com.au)



## **Azerbaijan**

### **ARTEKO\***

Ak.H.Aliyev str 78A  
Baku, AZ1110  
Azerbaijan  
Tel. +99412-465-69-21  
E-mail [info@arteko.az](mailto:info@arteko.az)  
[www.arteko.az](http://www.arteko.az)



## **Belarus**

### **OOO Evroparket\***

per.Stebneva 9a  
220024 Minsk  
Belarus  
Tel. +375 29 133-20-20  
E-mail [info@evroparket.by](mailto:info@evroparket.by)  
[www.evroparket.by](http://www.evroparket.by)



## **Belgium**

### **Uzin Utz België nv**

Poortakkerstraat 37/0102  
9051 Gent  
Belgium  
Tel. +32 9 222 58 48  
E-mail [be@uzin-utz.com](mailto:be@uzin-utz.com)  
[www.pallmann.be](http://www.pallmann.be)



## **China**

### **Uzin Utz Construction**

Materials (Shanghai) Co. Ltd.  
No. 3968 Huqingping Highway  
Zhaoxiang | District Qingpu  
Shanghai 201703  
China  
Tel. +86 21 59 75 82 20  
E-mail [pallmann.cn@uzin-utz.com](mailto:pallmann.cn@uzin-utz.com)  
[www.uzin.com.cn](http://www.uzin.com.cn)



## **Croatia**

### **Uzin Utz Hrvatska d.o.o.**

Trgovačka 6  
CMP Savica-Šanci  
10000 Zagreb  
Croatia  
Tel. +385 1 2498214  
E-mail [pallmann.hr@uzin-utz.com](mailto:pallmann.hr@uzin-utz.com)  
[www.uzin.hr](http://www.uzin.hr)



## **Czech Republic**

### **Uzin Utz Česká republika s.r.o.**

Českomoravská 12  
19000 Praha 9  
Czech Republic  
Tel. +420 2 83 08 33 14  
E-mail [pallmann.cz@uzin-utz.com](mailto:pallmann.cz@uzin-utz.com)  
[www.pallmann.cz](http://www.pallmann.cz)



## **Denmark**

### **Uzin Utz Denmark ApS**

Nyvang Alle 10  
2770 Kastrup  
Denmark  
Tel. +45 32 52 11 62  
E-mail [pallmann.dk@uzin-utz.com](mailto:pallmann.dk@uzin-utz.com)  
[www.pallmann.dk](http://www.pallmann.dk)



## **Finland**

### **PALLMANN GmbH**

Im Kreuz 6  
97076 Würzburg  
Germany  
Tel. +358 44 3700 186  
E-mail [pallmann.fi@uzin-utz.com](mailto:pallmann.fi@uzin-utz.com)  
[www.pallmann.fi](http://www.pallmann.fi)



## **France**

### **PALLMANN GmbH**

Im Kreuz 6  
97076 Würzburg  
Germany  
Tel. +33 6 26 81 11 79  
E-mail [pallmann.fr@uzin-utz.com](mailto:pallmann.fr@uzin-utz.com)  
[www.pallmann.fr](http://www.pallmann.fr)



## **Georgia**

### **Bauflexy\***

Bochuastr. 4,  
0159 Tbilisi  
Georgia  
Tel. +995 32 204 88 84  
E-mail [info@bauflexy.ge](mailto:info@bauflexy.ge)



## **Germany**

### **PALLMANN GmbH**

Im Kreuz 6  
97076 Würzburg  
Germany  
Tel. +49 931 27964-0  
E-mail [info@pallmann.net](mailto:info@pallmann.net)  
[www.pallmann.net](http://www.pallmann.net)

**Great Britain****PALLMANN GmbH**

Im Kreuz 6  
97076 Würzburg  
Germany  
Tel. +44 7825 382174  
E-mail pallmann.uk@uzin-utz.com  
www.pallmann.co.uk

**New Zealand****Uzin Utz South Pacific Ltd.**

PO Box 426  
New Zealand  
Whangaparaoa 0943  
Tel. +64 9 424 0366  
E-mail info@ufloor-systems.net  
www.uzin.co.nz

**Slovenia****Uzin Utz Slovenija d.o.o.**

Kajakaška cesta 30  
1211 Ljubljana  
Slovenia  
Tel. +386 1 511 0200  
E-mail pallmann.si@uzin-utz.com  
www.pallmann.si

**Greece****Polychimiki G. Matziaris S.A.\***

14th km Old National Rd  
Industrial Park of Anchialos  
57011 Thessaloniki  
Greece  
Tel. +30 2310 7229 91  
E-mail uzin@otenet.gr  
www.pallmann.gr

**Norway****Industri- og Boligprodukter AS\***

Brobekkveien 80C  
0582 Oslo  
Norway  
Tel. +47 2324 4800  
E-mail firmapost@ibg.no  
www.ibg.no

**Spain****PALLMANN GmbH**

Im Kreuz 6  
97076 Würzburg  
Germany  
Tel. +34 664 572 714  
E-mail pallmann.es@uzin-utz.com  
www.es.pallmann.net

**Hungary****Uzin Utz Magyarország Kft**

Bányató u. 13  
1108 Budapest  
Hungary  
Tel. +36 14319422  
E-mail pallmann.hu@uzin-utz.com  
www.uzin.hu

**Poland****Uzin Utz Polska Sp. z o.o.**

Ul. Jaworzynska nr. 287  
59-220 Legnica  
Poland  
Tel. +48 76 7 23 91 60  
E-mail pallmann.pl@uzin-utz.com  
www.pallmann.pl

**Sweden****PALLMANN GmbH**

Im Kreuz 6  
97076 Würzburg  
Germany  
Tel. +46 733 547940  
E-mail pallmann.se@uzin-utz.com  
www.pallmann.se

**Iceland****Álfaborg\***

Skútuvoði 6  
104 Reykjavík  
Iceland  
Tel. +354 568 6755  
E-mail alfaborg@alfaborg.is  
www.alfaborg.is

**Portugal****PALLMANN GmbH**

Im Kreuz 6  
97076 Würzburg  
Germany  
Tel. +34 664 572 714  
E-mail pallmann.pt@uzin-utz.com  
www.pallmann.net

**Switzerland****Uzin Utz Schweiz AG**

Ennetbürgerstrasse 47  
6374 Buochs  
Switzerland  
Tel. +41 41 6 24 48 88  
E-mail pallmann.ch@uzin-utz.com  
www.pallmann-schweiz.ch

**Italy****Uzin Utz AG – Filiale Italia**

Via Francesco Solimena, 155  
80129 Napoli  
Italy  
Tel. +39 348 3255 509  
E-mail pallmann.it@uzin-utz.com  
www.uzin.com

**Russia****OOO SMP\***

Leningradskoje Schosse d.84 Str.1  
125565 Moskau  
Russia  
Tel. +7 (495) 225 76 40  
E-mail pol-star@mail.ru  
www.pallmann-rus.ru

**Ukraine****SMP-Ukraine\***

Borodynska Street 43  
49029 Dnipro  
Ukraine  
Tel. +380 562 362549  
E-mail info@smp.ua  
www.smp-ukr.com

**Moldova****Parkeknii Dvor\***

Str. V. Alecsandri 106  
MD 2009, Chisinau  
Moldavia  
Tel. +373 22 549 225  
E-mail gepal-grup@mail.ru  
www.vip-parquet.md

**Serbia****Uzin Utz Srbija d.o.o.**

Bulevar Peka Dapčevića 43  
11000 Beograd  
Serbia  
Tel. +381 11 3989 044  
E-mail pallmann.rs@uzin-utz.com  
www.uzin.rs

**United States of America****Uzin Utz North America Inc.**

14509 E. 33rd Place  
Unit G Aurora CO 80011  
USA  
Tel. +1 720 374-4810  
E-mail pallmann.us@uzin-utz.com  
www.pallmann.us

**Netherlands****Uzin Utz Nederland bv**

Bouwstraat 18  
7483 PA Haaksbergen  
Netherlands  
Tel. +31 53 5 73 73 73  
E-mail pallmann.nl@uzin-utz.com  
www.pallmann.nl

**Slovakia****HA-UZ market s.r.o.\***

Štrková 94  
01001 Žilina  
Slovakia  
Tel. +421 903 528 624  
E-mail objednavky@ha-uz.sk  
www.pallmann.sk

**All other countries:**

PALLMANN GmbH  
Im Kreuz 6 | 97076 Würzburg  
Germany  
Tel. +49 931 27964-0  
E-mail info@pallmann.net  
www.good-for-wood.com

\*Distributor partner





**PALLMANN GmbH**

Im Kreuz 6  
97076 Würzburg  
Germany

T +49 937 27964-0  
F +49 931 27964-50  
info@pallmann.net  
www.pallmann.net

12.2021/12.2021/10.000/zudem/leR