




REMOVE SPOTS FROM YOUR wooden surfaces


WOOD STAIN REMOVER

Wood Stain Remover effectively dissolves grease, blood, coffee, tea etc. May be used on unfinished, soaped, oiled or waxed interior surfaces. Stain Remover is based on soap and specially developed for indoor use to remove stains from oiled wood surfaces.

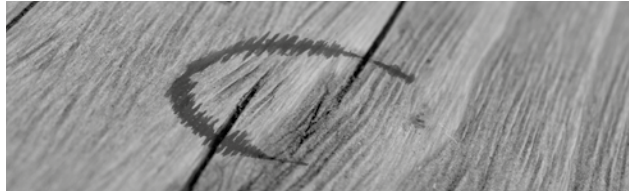

TANNIN SPOT REMOVER

Tannin Spot Remover effectively removes black spots caused by acid/water reaction. May be used on unfinished, soaped, oiled or waxed interior surfaces.

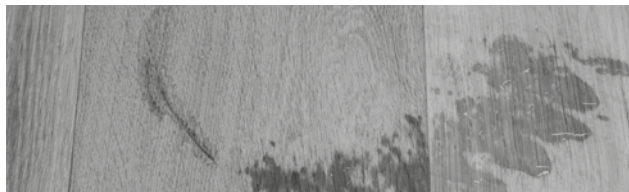

① PREPARE ② TREAT ③ MAINTAIN

HOW TO TAKE CARE OF YOUR OILED FLOORS



FLOORS



WOCA Denmark A/S · Tværvej 6 · 6640 Lunderskov, Denmark
Tel. +45 9958 5600 · info@wocadenmark.com · wocadenmark.com

406119UK 042020

REGULAR CLEANING

simple and fast



NATURAL SOAP

- Nourishing effect
- For the basic treatment of softwood
- For regularly cleaning



WORKFLOW

1 Natural Soap is shaken carefully before use. Make sure the pigments are mixed well.

2 125 ml Natural Soap is mixed into 5 L of cold water.

3 Wipe down the surface with a well-wrung mop.

NB! Use mops with high cotton content. Don't use mops containing microfiber only.

Clean the floor with minimum quantity of water – leave soap water on floor briefly in order to dissolve dirt. Remove dirty soap water with hard-wrung mop or cloth and rinse out in bucket with rinsing water.

For best results, use two buckets: One with the soap solution and the second with clean water to rinse the dirty mop.

REGULAR REFRESHING

every fourth time



OIL REFRESHING SOAP

- Enhances the natural colour of the wood
- Cleans and maintains the floor gently
- Leaves a mat protecting oil film on the wood surface



WORKFLOW

1 Shake the container well before use. Make sure the pigments are mixed well.

2 Mix Oil Refreshing Soap with lukewarm water: – For traditionally oiled floors: 250 ml soap with 5 L of water. – The mixture ratio can vary depending on wear.

3 Damp mop the floor lengthwise with the soap water. It is recommended to clean an area of approx. 10 m². ft. at a time.

4 Leave wood to dry for approx. 2 hours before use.

5 If a light shine is wanted, polish the dry floor with a white pad.

For best results, use two buckets: One with soap water and the second with clean water to rinse the dirty mop.

REJUVENATE

when needed



STEP 1 - INTENSIVE WOOD CLEANER

- Prepares surfaces for additional treatment
- Basic cleaning and grease removal
- High efficiency



WORKFLOW

1 Mix 250 ml of Intensive Wood Cleaner with 5 L warm water.

2 Wipe the wood surface with a well-wrung mop. For best results, leave Wood Cleaner solution on the surface to work for 5 minutes and wipe again with clean water. If necessary, the surface can be cleaned with a hand-held pad or a floor machine. If the surface is very dirty, repeat.

3 Let the surface dry completely before subsequent treatment.

STEP 2 - OIL CARE

- Simple application both manually and by machine
- Fast-drying
- Eco-friendly indoor environments



WORKFLOW

Product, room and floor temperature should be between 15-30° C. Ensure good ventilation at all times during the application and drying time.

1 Shake the container carefully. Polish in a thin layer of the Oil Care with a white pad, cotton cloth or use polishing machine for large surfaces. It is important that the Oil Care is carefully polished into the wood. Continue polishing until the wood appears saturated and the surface looks uniform.

2 The floor should not appear wet and there should not be any excess oil left on the surface after polishing.

3 Work in smaller areas one step at a time until the floor is finished.

4 After 1-2 hours, the floor can be used with caution. Do not expose the floor to water during hardening time – approx. 24 hours

Choose the right colour of your soap/oil care

- **Natural:** beige and dark tone wood floors
- **White:** light tone wood floors

